

Wall Control

FV-SCVE2

Specification Submittal Data / Panasonic Wall Control FV-SCVE2

For exclusive use with the following Panasonic ERV Units:

BalancedHome™ Elite & Elite Plus+: FV-15VE1T, FV-15VE1S, FV-12VE1T, FV-12VE1S, FV-16VEC1T, FV-16VEC1S, FV-13VEC1T, FV-13VEC1S

Intelli-Balance® Elite & Elite Plus+: FV-15ESC1, FV12ESC1, FV-14ES1, FV11ES1



Controls:

- Supply and Exhaust
- Boost Timer and Activation

Displays:

- FID Fault Indicator Display CEC Compliant
- Filter Status
- Air Flow Rate
- Power Usage
- Current Ventilation Mode

Model No	FV-SCVE2
Voltage	DC12V
Power Consumption (W)	1.8
Net Weight lb. (kg)	0.26 (0.119)

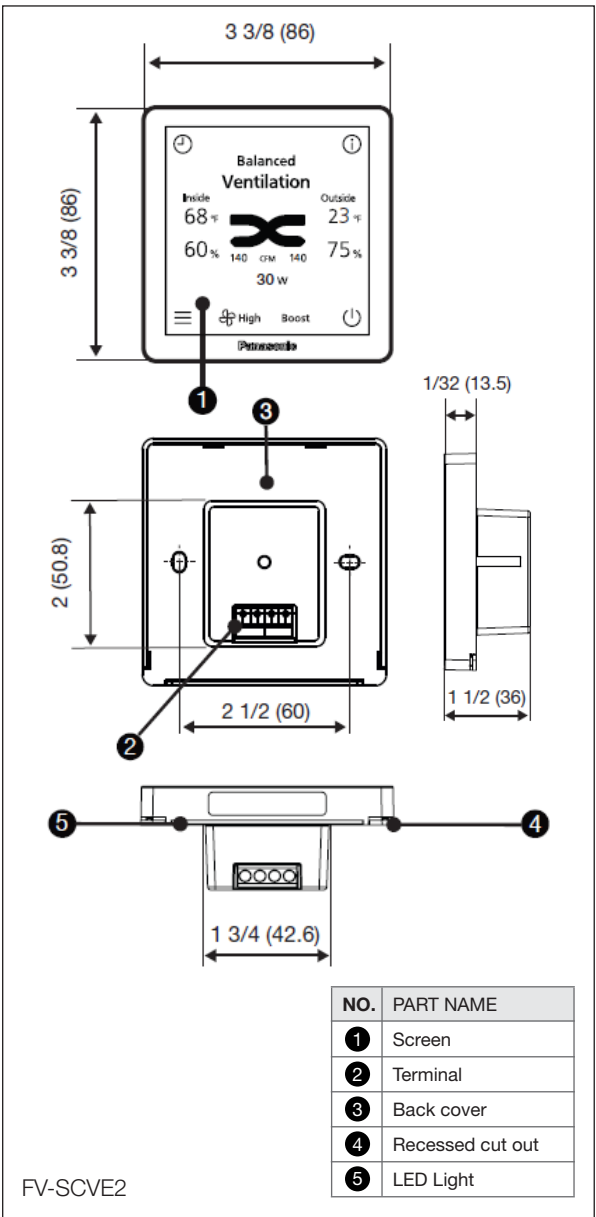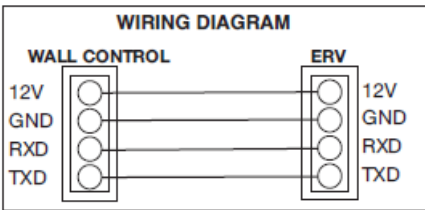

For complete Installation Instructions visit iaq.na.panasonic.com

Model	Quantity	Comments	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

Panasonic
IAQ Division
Two Riverfront Plaza
Newark, NJ 07102
iaq.na.panasonic.com

IAQ25254ST-R1

Panasonic