



325 COMMERCE DRIVE
 MT VERNON, OH 43050
 800-253-8236

SPECIFICATION DATA SHEET

DATE: 11-1-13
 PREPARED BY: RL

**MODEL NO. 128
 DAMPER SECTION**

Standard Model

DIMENSIONS

| SIZE | A | B |
|------|-----|-----------|
| 4" | 4" | 7" or 12" |
| 5" | 5" | 7" or 12" |
| 6" | 6" | 7" or 12" |
| 7" | 7" | 7" or 12" |
| 8" | 8" | 7" or 12" |
| 10" | 10" | 7" or 12" |
| 12" | 12" | 7" or 12" |
| 14" | 14" | 7" or 12" |
| 16" | 16" | 7" or 12" |

MATERIAL SPECIFICATIONS

HOT DIPPED GALVANIZED STEEL.
 PER ASTM A 653 CSB.

BODY: 4"-8" = STANDARD GAUGE
 9"-16" = 28 GAUGE
 26 GAUGE & 24 GAUGE AVAILABLE


DAMPER: 4"-8" = 28GA MINIMUM
 9"-12" = 26GA MINIMUM
 14" & UP = 24GA MINIMUM
 24GA AVAILABLE FOR 4"-12" DAMPER

ASSEMBLED WITH 1/8" ZINC COATED RIVETS.

OPTIONS

Available in 7" long or 12" long

Damper standoffs available:
 Economy
 Durodyne-1/4" damper ends.
 Durodyne-3/8"square continuous shaft.

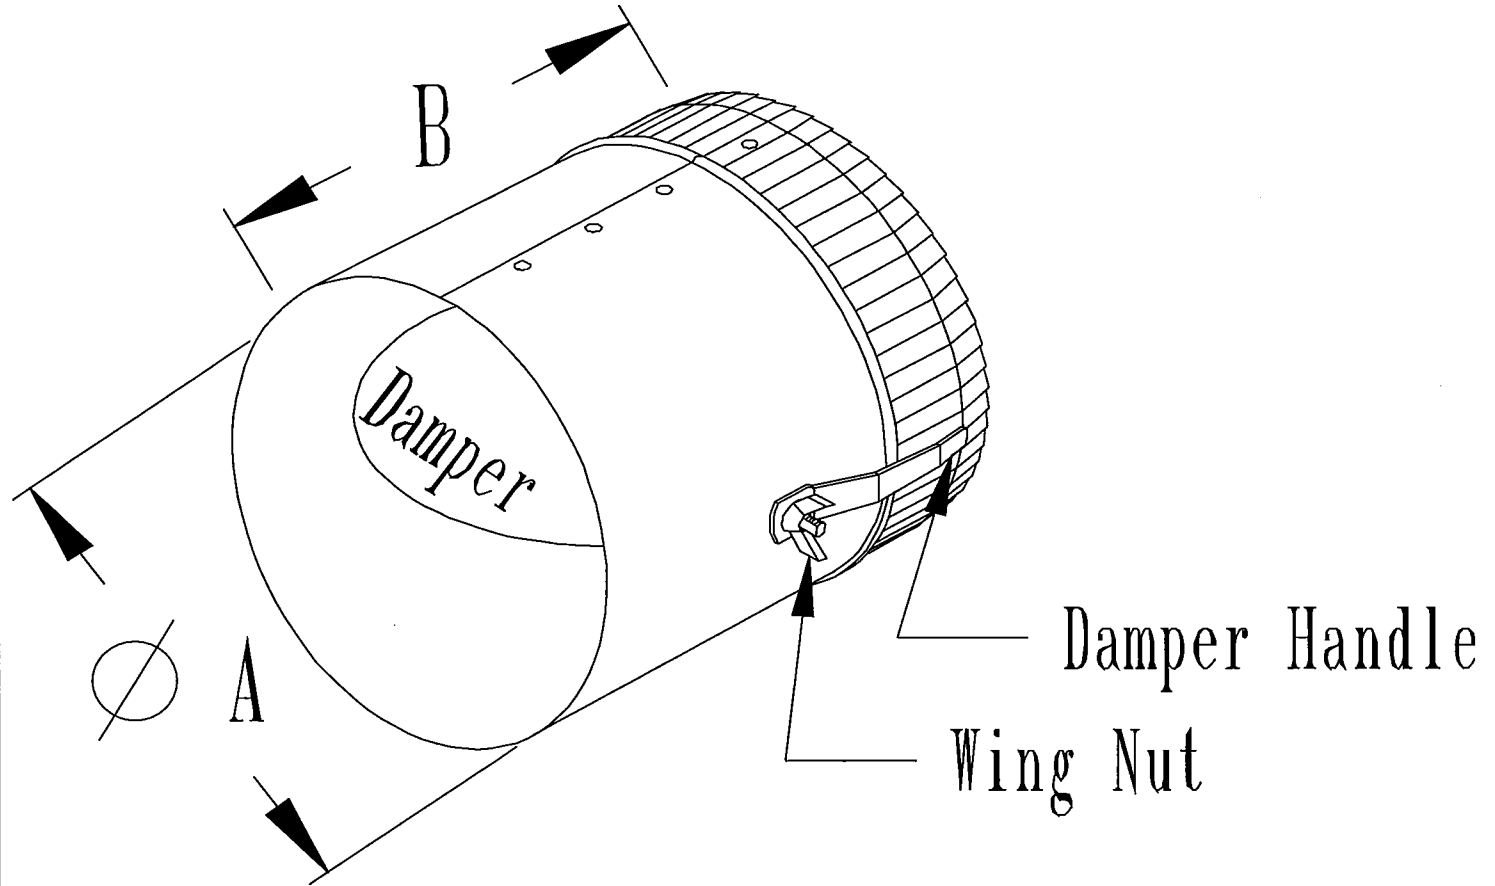

JOB: _____
 LOCATION: _____
 CONTRACTOR: _____
 ENGINEER: _____
 NOTES: _____