
CDS[®]



SmartAir's light bar will change color to indicate indoor air quality.

Identify IAQ Issues, Diagnose Causes & Recommend Solutions

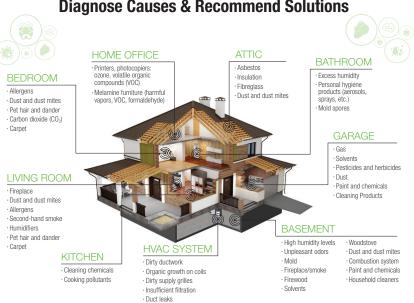

Advanced Tools Smart Solutions

IAQPRO SmartAir™

Professional Indoor Air Quality Meter

The **SmartAir** sets a new standard for professional indoor air quality meters. HVAC technicians can now quickly measure and record the quality of indoor air, identify problem causes and share solutions.

PROFESSIONAL RESULTS MADE EASY

Independent sensors accurately measure the air for particulate matter ($PM_{2.5} \& PM_{10}$), volatile organic compounds, carbon dioxide, temperature, relative humidity, building pressure and dew point.

INSTANTLY DOCUMENT AND SHARE RESULTS

The CPS Link™ app automatically logs measurements and identifies likely causes of air quality problems. Results can be instantly e-mailed to a client, company office, or others. Stored data validates that an air quality analysis was performed.

SELL ADDITIONAL PRODUCTS AND SERVICES

The app also generates a report of recommended products, services and customizable prices that technicians can provide to clients to resolve indoor air quality problems (new sources of revenue).



Dashboard screenLive readings of 8 items affecting indoor air quality



Air quality test reportEnter custom prices for the solutions provided, or your own solutions











IAQPRO SmartAir™ Professional Indoor Air Quality Meter





Specifications			
Transmission Range	Up to 150 Ft (46 m) (Direct line of sight)		
Standard Test Timeframe	30 Minutes (Default - Adjustable)		
Mobile Device Compatability (For Optimum Performance)	iOs (SE, 8 or newer); Android (OS 7.0 or newer)		
Size/Weight	5"H (12.7cm), 3.5" (9cm) Dia., [0.65 Lb (0.3 kg)]		
Power Cord (USB-C Cable)	6.6 Ft. (2 m)		
Protective Carrying Case	EVA semi-rigid shell, with internal compartments		
Warranty	1 Year		

IAQPRO SmartAir Measurement Specificiations

Air Quality Factor	Measurement Temperature	Accuracy	Operating Range	Minimum Time To Acquir Accurate Data*	
Temperature		±2.3 °F (±1.3 °C)		Immediate	
Pressure	Static Pressure	±0.100 in.WC (±0.25 hPa)	32°F ~ 122°F (0 ~ 50° C) 10 ~ 95% r.H,		
Dew Point	Dew Point Temperature	$\pm 2.3^{\circ}$ F ($\pm 1.3 ^{\circ}$ C) $\pm 5\%$ Of Reading	120 ~ 441 in.WC (300 ~ 1100 hPa)		
Humidity	Relative Humidity	±5% of Reading			
VOC's	Volatile Organic Compounds	±(50 ppb + 15%)	32°F ~ 122°F (0 ~ 50° C), 10 ~ 95% r.H., 120 ~ 441 in.WC (300 ~ 1100 hPa) 0 ~ 60,000 ppb	5 Minutes To 60 Minutes	
CO ₂	Carbon Dioxide	± (100 ppm +3% Of Reading)	32°F ~ 122°F (0 ~ 50° C), 10 ~ 95% r.H., 120 ~ 441 in.WC (300 ~ 1100 hPa) 0 ~ 5,000 ppm	3 Minutes	
PM2.5	Fine Particulate Matter	± 25ug/m3 for < 100 ug/m3;	32°F ~ 122°F (0 ~ 50° C), 10 ~ 95% r.H.,		
PM10	Particulate Matter	$\pm 25\%$ for > 100ug/m3	120 ~ 441 in.WC (300 ~ 1100 hPa) 0 ~ 1,000 ug/m3	Immediate	

^{*} After being powered ON. If stored in temperature extremes, let SmartAir adjust (unplugged) to indoor temperature for 6~8 hours. See Quick Start Guide or Owner's Manual for additional use instructions.

Packaging	H x W x D, Inches (cm)	Weight, Lbs (kg)	Product Qty Per	UPC #
Color Box	9.1" x 4.1" x 4.6" (23 x 10 x 12 cm)	1.60 lb (.72 kg)	1	750377116384
Inner Box	14.6" x 8.8" x 9.6" (37 x 23 x 25 cm)	9.2 lb (4.2 kg)	6	n/a
Master Box	18.5" x 15.2" x 20.1" (47 x 39 x 51 cm)	36.4 lb (16.5 kg)	24	n/a

SmartAir is NOT a life-saving device and does not provide absolute values for all indoor airborne solids, liquids or gases that may be present. It does not replace the capability of existing smoke alarms, carbon monoxide alarms, heat alarms or other life safety devices.





App Store





Designed for use with APPLE® products. APPLE® is a registered trademark in the United States and other countries. Designed for use with Android® products. Android® is a registered trademark in the United States and other countries. Bluetooth® is a registered trademark in the United States and other countries. All trademarks are owned by their respective companies.





