

PROJECT:	_____	UNIT TAG:	_____	QUANTITY:	_____
REPRESENTATIVE:	_____	TYPE OF SERVICE:	_____	DATE:	_____
ENGINEER:	_____	SUBMITTED BY:	_____	DATE:	_____
CONTRACTOR:	_____	APPROVED BY:	_____	DATE:	_____
	_____	ORDER NO.:	_____	DATE:	_____





UPS 43-100 F

Circulator pumps

Product photo could vary from the actual product

Conditions of Service	Pump Data	Motor Data
Flow: _____	Maximum operating pressure: 145 psi	Max. power input: 370 W
Head: _____	Liquid temperature range: 32 .. 230 °F	Rated power - P2: 0.33 HP
Efficiency: _____	Maximum ambient temperature: 104 °F	Rated voltage: 230 V
Liquid: Water	Approvals: ETL, CSA	Main frequency: 60 Hz
Temperature: 140 °F	Type of connection: C.I. Flange	Insulation class: H
NPSH required: ft	Flange standard: USA Oval	Motor protection: CONTACT
Viscosity: _____	Pipe connection: 2 - Bolt Flange	Thermal protection: internal
Specific Gravity: 0.985	Product number: 95906637	

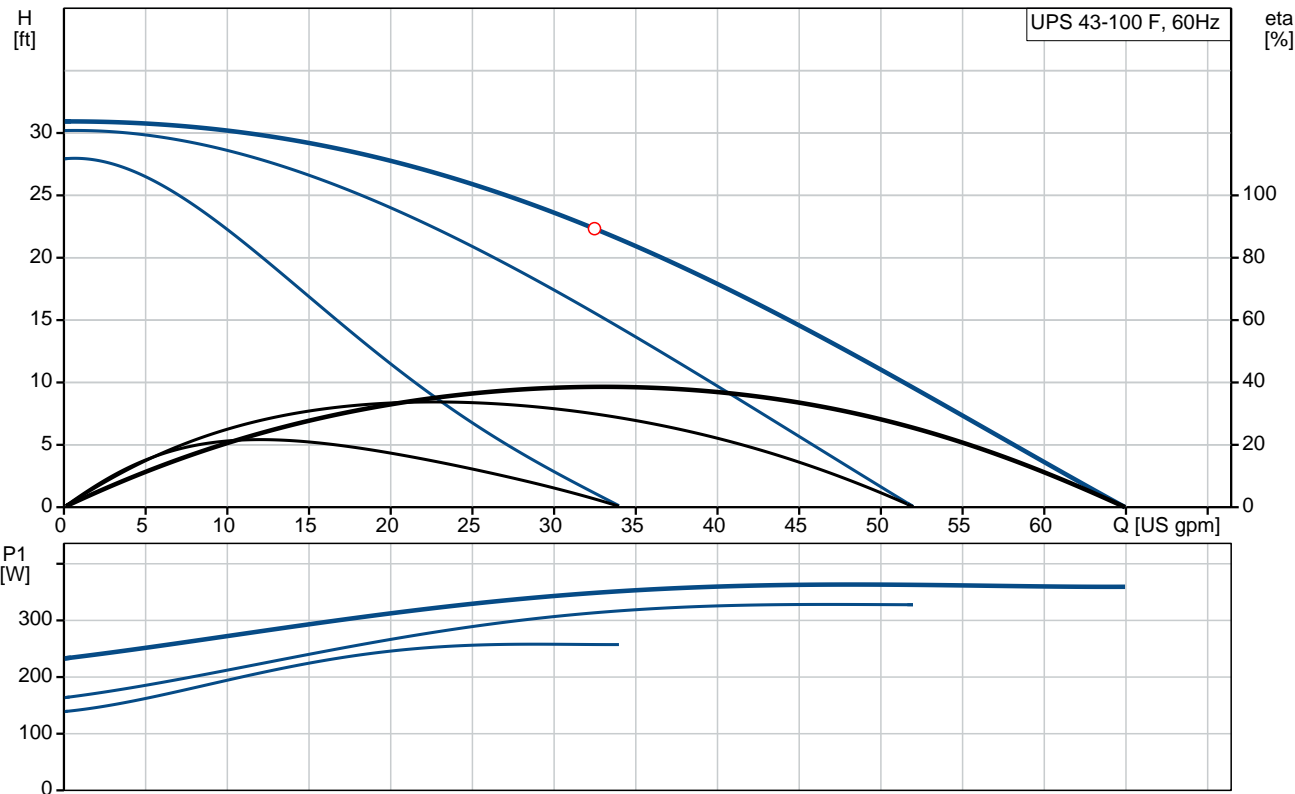

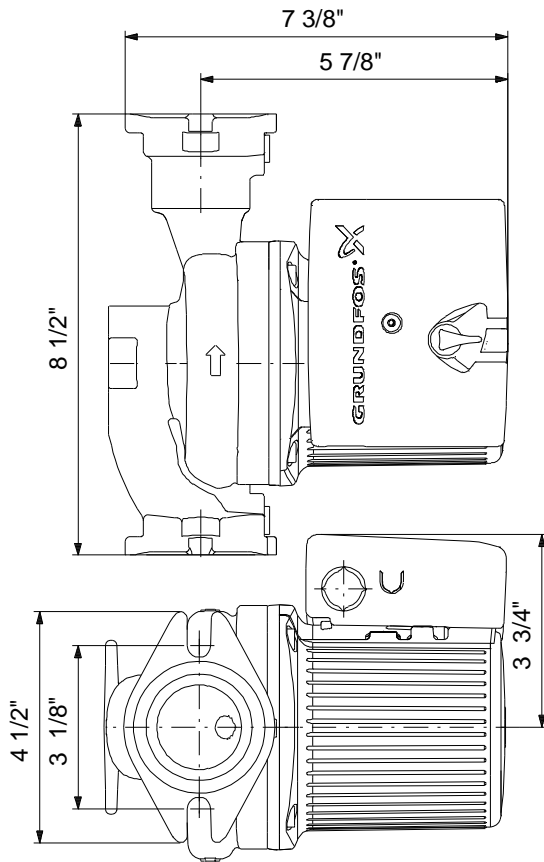

**Materials:**

Pump housing: Cast iron  
EN-GJL-200

Impeller: Composite, PES

## Tender Text



Product photo could vary from the actual product

Product No.: [95906637](#)

### UPS 43-100 F

The pump is of the canned rotor type, i.e. pump and motor form an integral unit without shaft seal and with only two gaskets for sealing. The bearings are lubricated by the pumped liquid.

The pump is characterized by:

- \* Ceramic shaft and radial bearings.
- \* Carbon axial bearing.
- \* Stainless steel rotor can and bearing plate.
- \* Corrosion-resistant impeller, Composite, PES.
- \* Cast iron pump housing.

The motor is a 1-phase motor.

No additional motor protection is required.

### Liquid:

Pumped liquid: Water  
Liquid temperature range: 32 .. 230 °F  
Liquid temperature during operation: 140 °F  
Density: 61.35 lb/ft<sup>3</sup>

### Technical:

Approvals on nameplate: ETL, CSA

### Materials:

Pump housing: Cast iron  
EN-GJL-200  
Impeller: Composite, PES

### Installation:

Maximum ambient temperature: 104 °F  
Ambient max at 176°F liquid: 176 °F  
Maximum operating pressure: 145 psi  
Flange standard: USA Oval  
Type of connection: C.I. Flange  
Pipe connection: 2 - Bolt Flange  
Pressure stage: 10  
Port-to-port length: 8 1/2 in

### Electrical data:

Power input in speed 1: 265 W  
Power input in speed 2: 335 W



**Company name:**

**Created by:**

**Phone:**


**Date:**

2/21/2018

Max. power input:	370 W
Rated power - P2:	0.33 HP
Main frequency:	60 Hz
Rated voltage:	1 x 230 V
Current in speed 1:	1.2 A
Current in speed 2:	1.5 A
Current in speed 3:	1.7 A
Capacitor size - run:	10 $\mu$ F/400 V
Number of poles:	2
Insulation class (IEC 85):	H

**Others:**

Gross weight:	18.5 lb
---------------	---------

Position	Count	Description
	1	<p><b>UPS 43-100 F</b></p>  <p>Product photo could vary from the actual product</p> <p>Product No.: <a href="#">95906637</a></p> <p>The pump is of the canned rotor type, i.e. pump and motor form an integral unit without shaft seal and with only two gaskets for sealing. The bearings are lubricated by the pumped liquid. The pump is characterized by:</p> <ul style="list-style-type: none"> <li>* Ceramic shaft and radial bearings.</li> <li>* Carbon axial bearing.</li> <li>* Stainless steel rotor can and bearing plate.</li> <li>* Corrosion-resistant impeller, Composite, PES.</li> <li>* Cast iron pump housing.</li> </ul> <p>The motor is a 1-phase motor. No additional motor protection is required.</p> <p><b>Liquid:</b>  Pumped liquid: Water  Liquid temperature range: 32 .. 230 °F  Liquid temperature during operation: 140 °F  Density: 61.35 lb/ft³</p> <p><b>Technical:</b>  Approvals on nameplate: ETL, CSA</p> <p><b>Materials:</b>  Pump housing: Cast iron  EN-GJL-200  Impeller: Composite, PES</p> <p><b>Installation:</b>  Maximum ambient temperature: 104 °F  Ambient max at 176°F liquid: 176 °F  Maximum operating pressure: 145 psi  Flange standard: USA Oval  Type of connection: C.I. Flange  Pipe connection: 2 - Bolt Flange  Pressure stage: 10  Port-to-port length: 8 1/2 in</p> <p><b>Electrical data:</b>  Power input in speed 1: 265 W  Power input in speed 2: 335 W  Max. power input: 370 W  Rated power - P2: 0.33 HP</p>



Company name:

Created by:


Phone:

Date:




2/21/2018

Position	Count	Description
		Main frequency: 60 Hz Rated voltage: 1 x 230 V Current in speed 1: 1.2 A Current in speed 2: 1.5 A Current in speed 3: 1.7 A Capacitor size - run: 10 $\mu$ F/400 V Number of poles: 2 Insulation class (IEC 85): H  <b>Others:</b> Gross weight: 18.5 lb

## 95906637 UPS 43-100 F 60 Hz

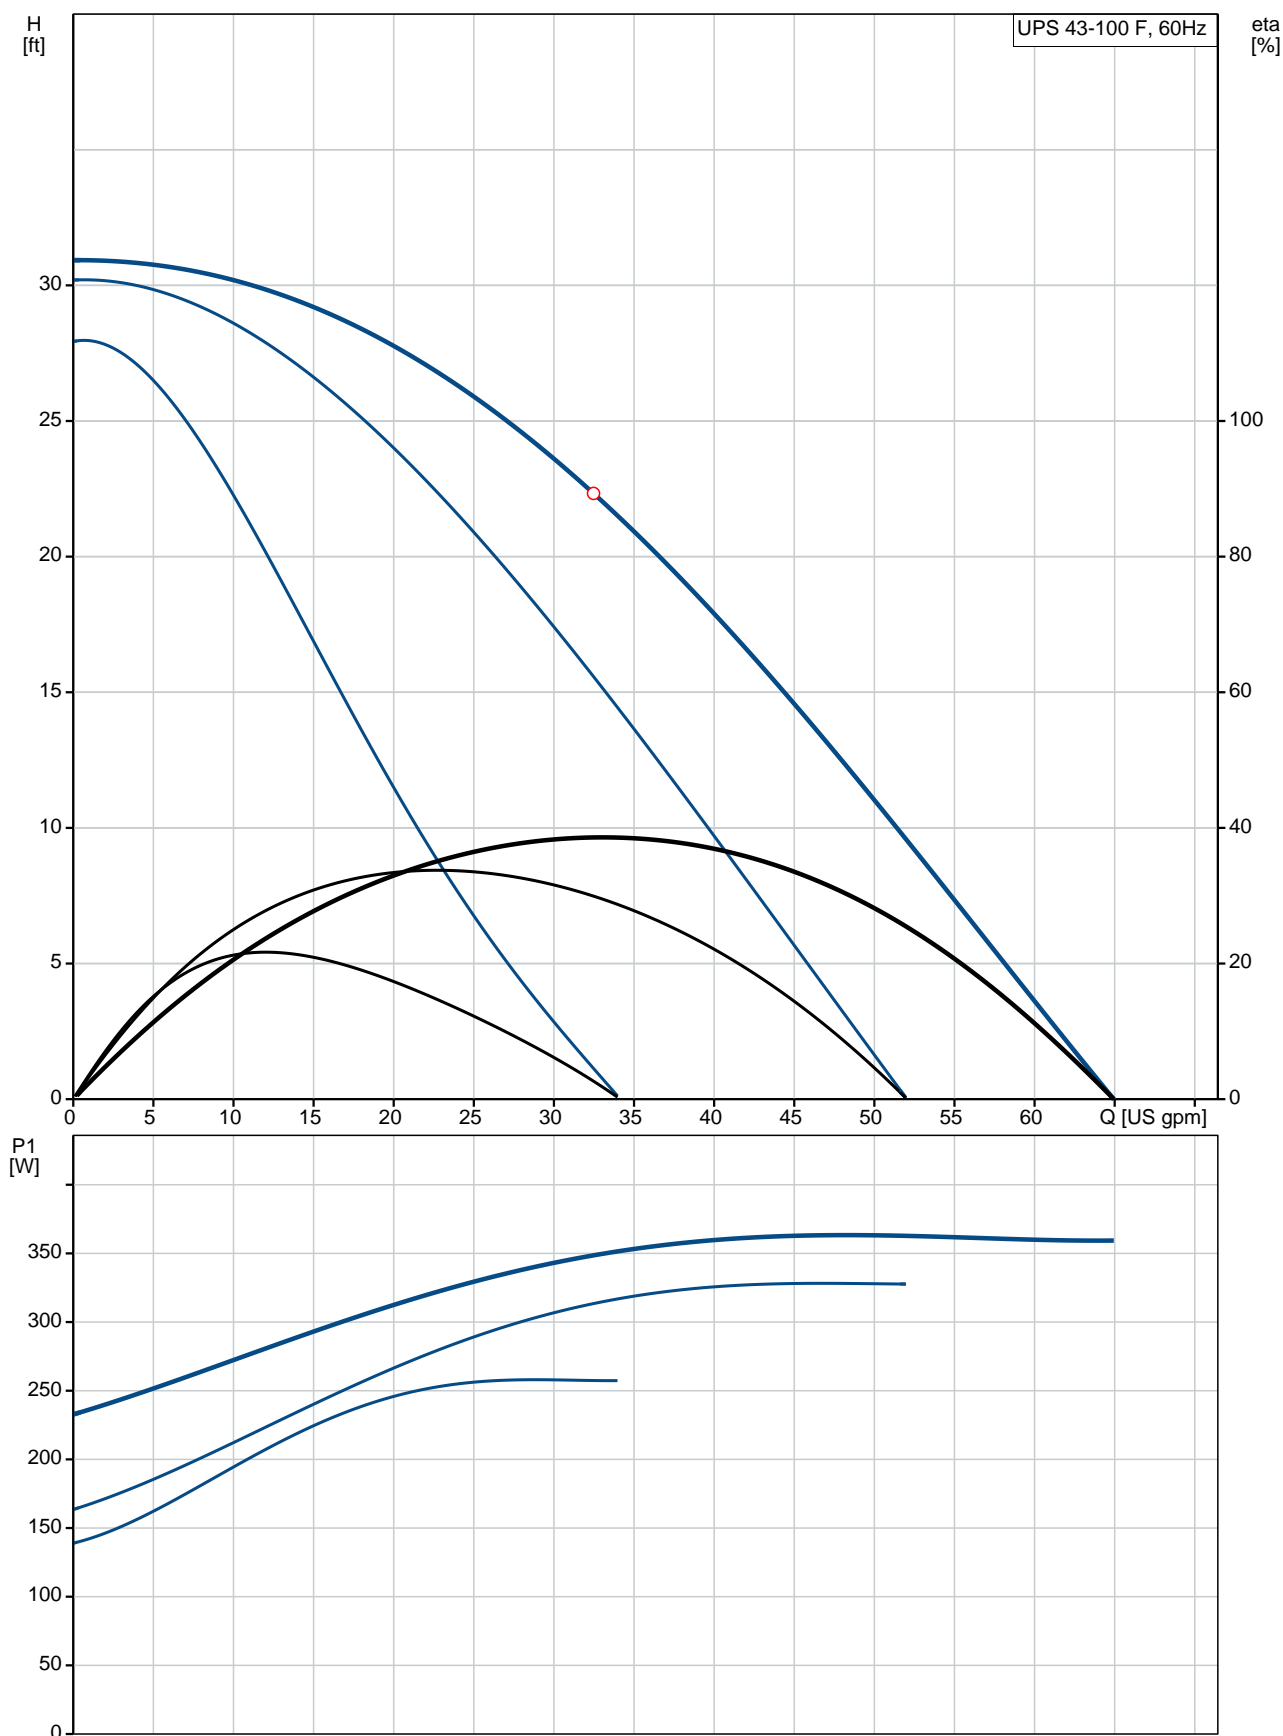


Description	Value
<b>General information:</b>	
Product name:	UPS 43-100 F
Product No.:	95906637
EAN:	5700313291755
<b>Technical:</b>	
Speed Number:	3
Max flow:	65 US gpm
Head max:	30.84 ft
Approvals on nameplate:	ETL, CSA
<b>Materials:</b>	
Pump housing:	Cast iron
	EN-GJL-200
Impeller:	Composite, PES
<b>Installation:</b>	
Maximum ambient temperature:	104 °F
Ambient max at 176°F liquid:	176 °F
Maximum operating pressure:	145 psi
Flange standard:	USA Oval
Type of connection:	C.I. Flange
Pipe connection:	2 - Bolt Flange
Pressure stage:	10
Port-to-port length:	8 1/2 in
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	32 .. 230 °F
Liquid temperature during operation:	140 °F
Density:	61.35 lb/ft³
<b>Electrical data:</b>	
Power input in speed 1:	265 W
Power input in speed 2:	335 W
Max. power input:	370 W
Rated power - P2:	0.33 HP
Main frequency:	60 Hz
Rated voltage:	1 x 230 V
Current in speed 1:	1.2 A
Current in speed 2:	1.5 A
Current in speed 3:	1.7 A
Capacitor size - run:	10 µF/400 V
Number of poles:	2
Insulation class (IEC 85):	H
Motor protection:	CONTACT
Thermal protec:	internal
<b>Controls:</b>	
Pos term box:	9H
<b>Others:</b>	
Gross weight:	18.5 lb

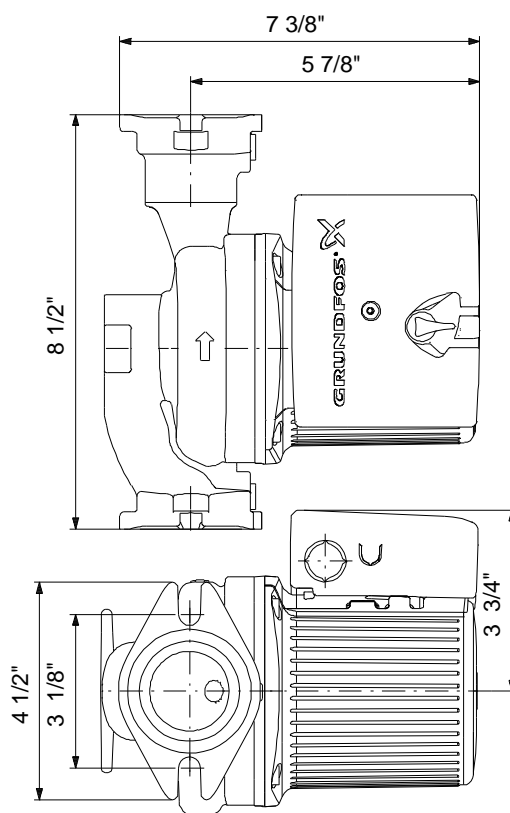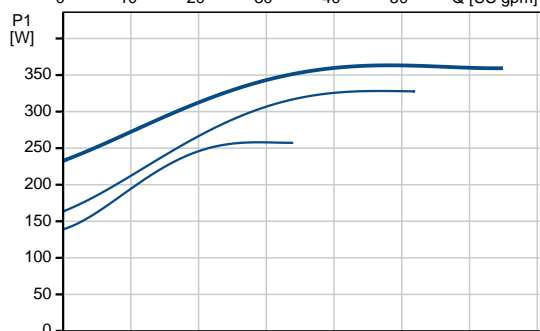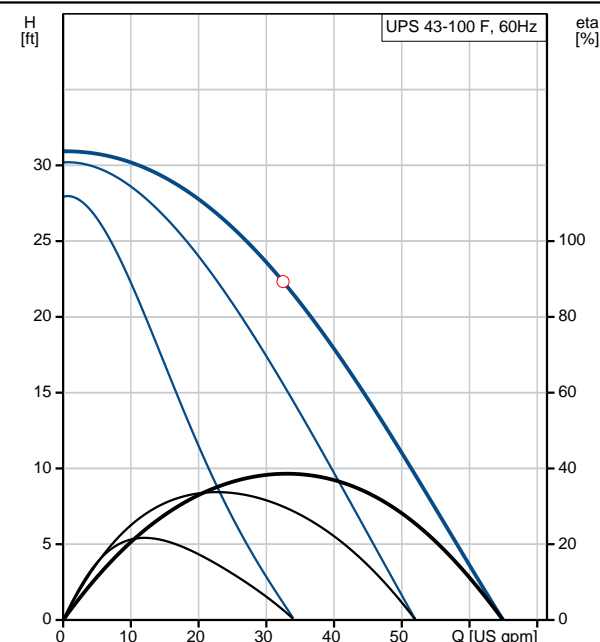



## 95906637 UPS 43-100 F 60 Hz

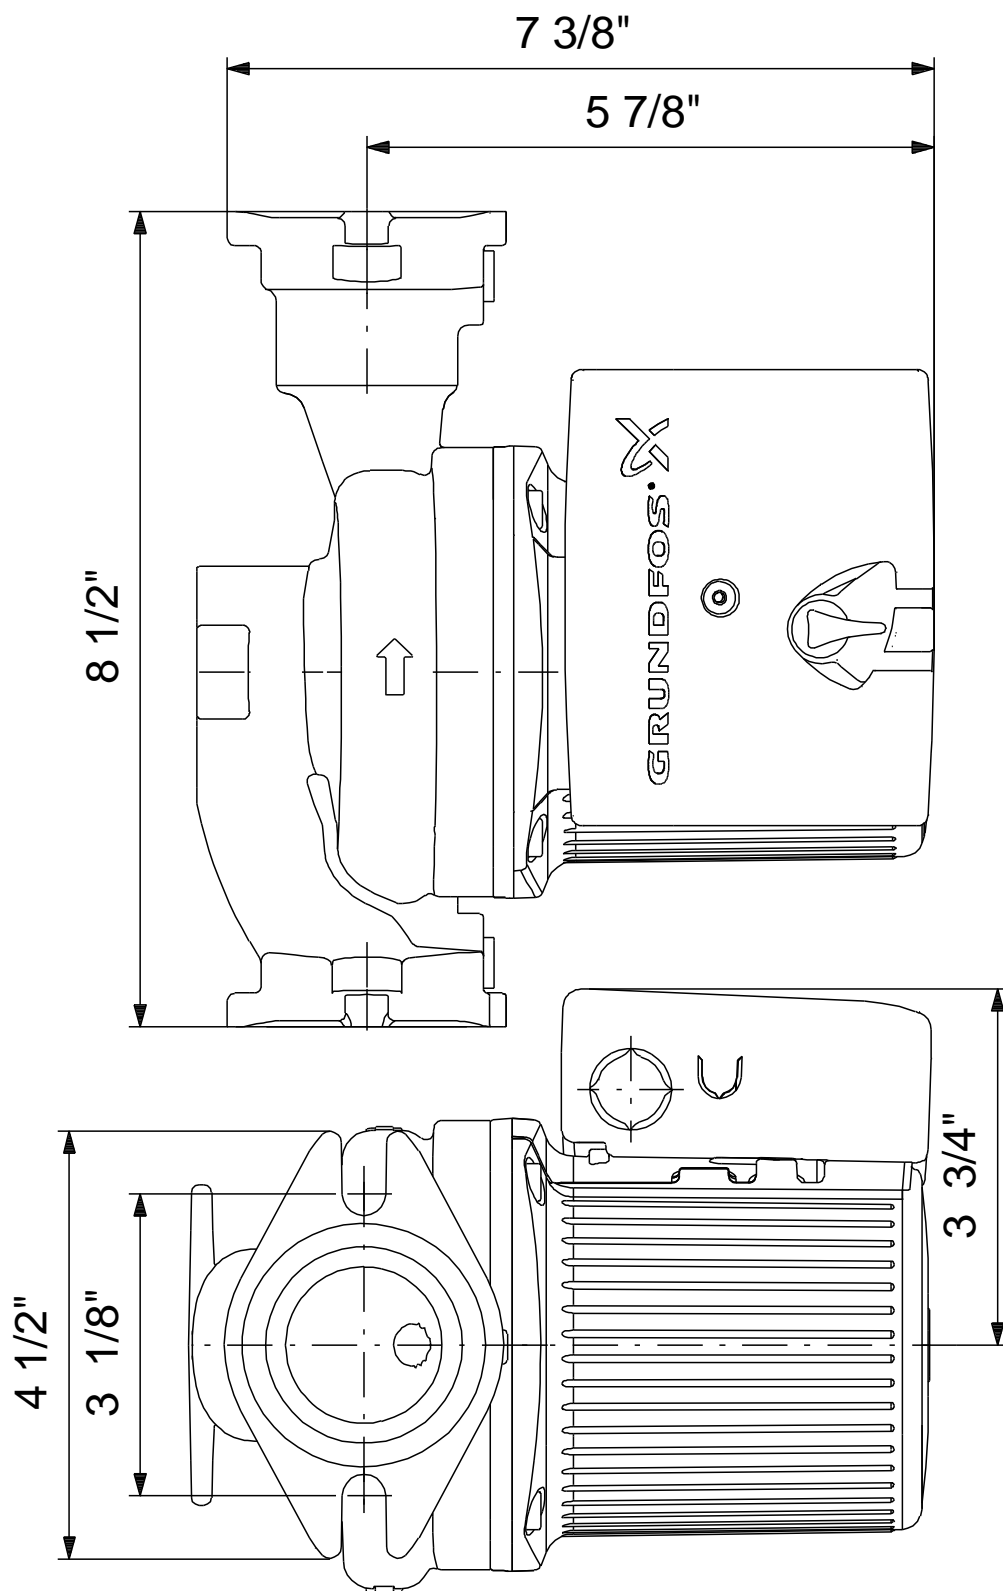

Note! All units are in [mm] unless otherwise stated.  
Disclaimer: This simplified dimensional drawing does not show all details.



Company name:

Created by:

Phone:

Date:

2/21/2018

---

**Order Data:**

Product name: UPS 43-100 F

Amount: 1

Product No.: 95906637

Total: Price on request

---