



325 COMMERCE DRIVE
MT VERNON, OH 43050
800-253-8236

SPECIFICATION DATA SHEET

DATE: 5-29-13
PREPARED BY: RL

MODEL NO. 9993 PVC COATED SPIRAL COUPLING

STANDARD MODEL

DIMENSIONS


SIZE	A	B	SIZE	A	B
3	3"	4 5/8	14	14"	4 5/8
4	4"	4 5/8	16	16"	4 5/8
5	5"	4 5/8	18	18"	4 5/8
6	6"	4 5/8	20	20"	4 5/8
7	7"	4 5/8	22	22"	4 5/8
8	8"	4 5/8	24	24"	4 5/8
9	9"	4 5/8	26	26"	4 5/8
10	10"	4 5/8	28	28"	4 5/8
12	12"	4 5/8	30	30"	4 5/8

MATERIAL SPECIFICATIONS

HOT DIPPED GALVANIZED STEEL.
WITH A 4 MIL. POLYVINYL COATING

3" - 8" = 26 GA MINIMUM
9" - 16" = 24 GA MINIMUM
18" & UP = 22 GA MINIMUM

ASSEMBLED WITH 1/8" STAINLESS STEEL RIVETS.

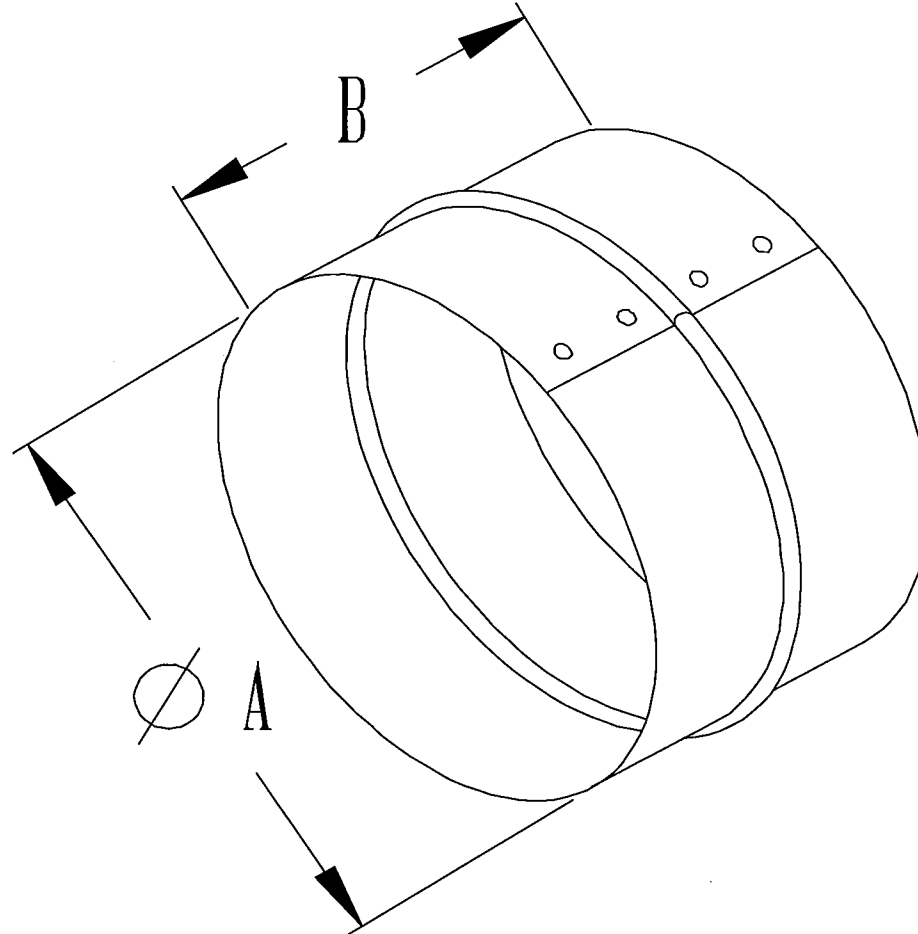

OPTIONS

JOB: _____
LOCATION: _____
CONTRACTOR: _____
ENGINEER: _____
NOTES: _____