


Model Number	Nominal Size (Inches) W x H x D	Actual Size (Inches) W x H x D	Rated Air Flow (CFM)	Initial Resistance (In. W.G.)	Media Area (Square Feet)
MX40-STD4-410	12 X 24 X 4	11-3/8 X 23-3/8 X 3-3/4	1000	0.22	11.2
MX40-STD4-401	16 X 20 X 4	15-1/2 X 19-1/2 X 3-3/4	1120	0.22	12.5
MX40-STD4-402	16 X 25 X 4	15-1/2 X 24-1/4 X 3-3/4	1400	0.22	15.6
MX40-STD4-412	18 X 24 X 4	17-3/8 X 23-3/8 X 3-3/4	1500	0.22	16.2
MX40-STD4-403	20 X 20 X 4	19-1/2 X 19-1/2 X 3-3/4	1400	0.22	15.6
MX40-STD4-411	20 X 24 X 4	19-3/8 X 23-3/8 X 3-3/4	1670	0.22	18.7
MX40-STD4-404	20 X 25 X 4	19-1/2 X 24-1/2 X 3-3/4	1750	0.22	19.6
MX40-STD4-405	24 X 24 X 4	23-3/8 X 23-3/8 X 3-3/4	2000	0.22	22.4
MX40-STD4-428	29 X 25 X 4	28-1/2 X 24-1/2 X 3-3/4	2430	0.22	26.1
MX40-STD4-431	30 X 28 X 4	29-1/2 X 27-1/2 X 3-3/4	2920	0.22	31.1

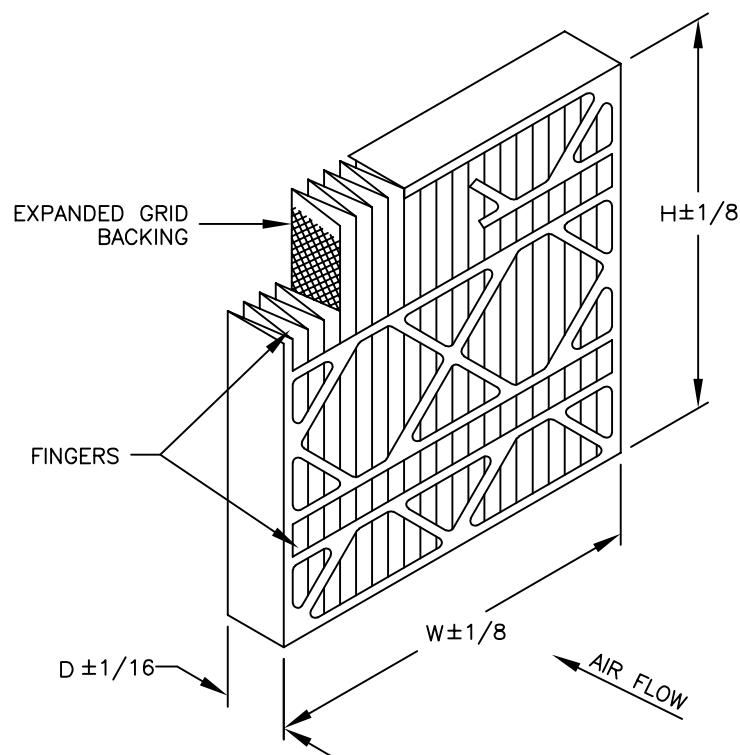

STANDARD CONSTRUCTION

- 100% Synthetic Thermally Bonded White Media
- 9.0 Pleats Per Foot
- Expanded Metal Pleat Supports
- Moisture Resistant Beverage Board Frame
- Double Wall Frame
- (2) Rows of Fingers on Air Entering Side

NOTES

- MERV 10 per ASHRAE 52.2-2017
MERV-A 8-A Per ASHRAE 52.2-2017 with Appendix J
- Final Resistance: 1.0" W.G.
- Rated Velocity: 500 FPM
- Classified Per UL Standard 900 for Flammability
- Maximum Operating Temperature: 225 deg. F



HVAC Filtration
Division
parker.com/HVAC

CONTACT FACTORY TO
VERIFY REVISION LEVEL

TOLERANCES UNLESS OTHERWISE SPECIFIED

FRACTIONAL —
DECIMAL —
ANGLES —

ALL DIMENSIONS IN INCHES

DRAWING NAME

DP MERV 10/8A STANDARD CAPACITY - 4" DEPTH

APPROVED BY *K. O.*

SPECIFICATION NO.
MKT-B-00803

PAGE
1 OF 1

SCALE
NONE

DWG. SIZE
A

REVISION
NEW

REVISION DATE
03-05-25

THIS MATERIAL IS PROPRIETARY, BEING EXCLUSIVELY OWNED BY PARKER HANNIFIN CORPORATION.
THE EXPRESSION OF THE INFORMATION CONTAINED HEREIN IS PROTECTED UNDER FEDERAL
COPYRIGHT LAWS. ALL RIGHTS RESERVED.