

Thermal Actuators

A30NO24 / A30NC24 / A30NC24EW

The SALUS A30 line of thermal actuators are the perfect solution for accurately controlling radiant heating and cooling systems. The actuators offer low power consumption, high-quality wax elements, a 5 year warranty and a range of configurations to ensure optimum performance for any job.

A30NO24

Normally Open
Thermal Actuator



A30NC24

Normally Closed
Thermal Actuator



A30NC24EW

Normally Closed Thermal
Actuator with End Switch


(includes additional micro switch for
direct control of electrical loads)



Features & Benefits

- Easy to install
- Adaptive stroke 4mm max
- Low power consumption (2W)
- 100N spring force
- High quality wax element
- Easy closing and opening display
- 5 year warranty

System Overview

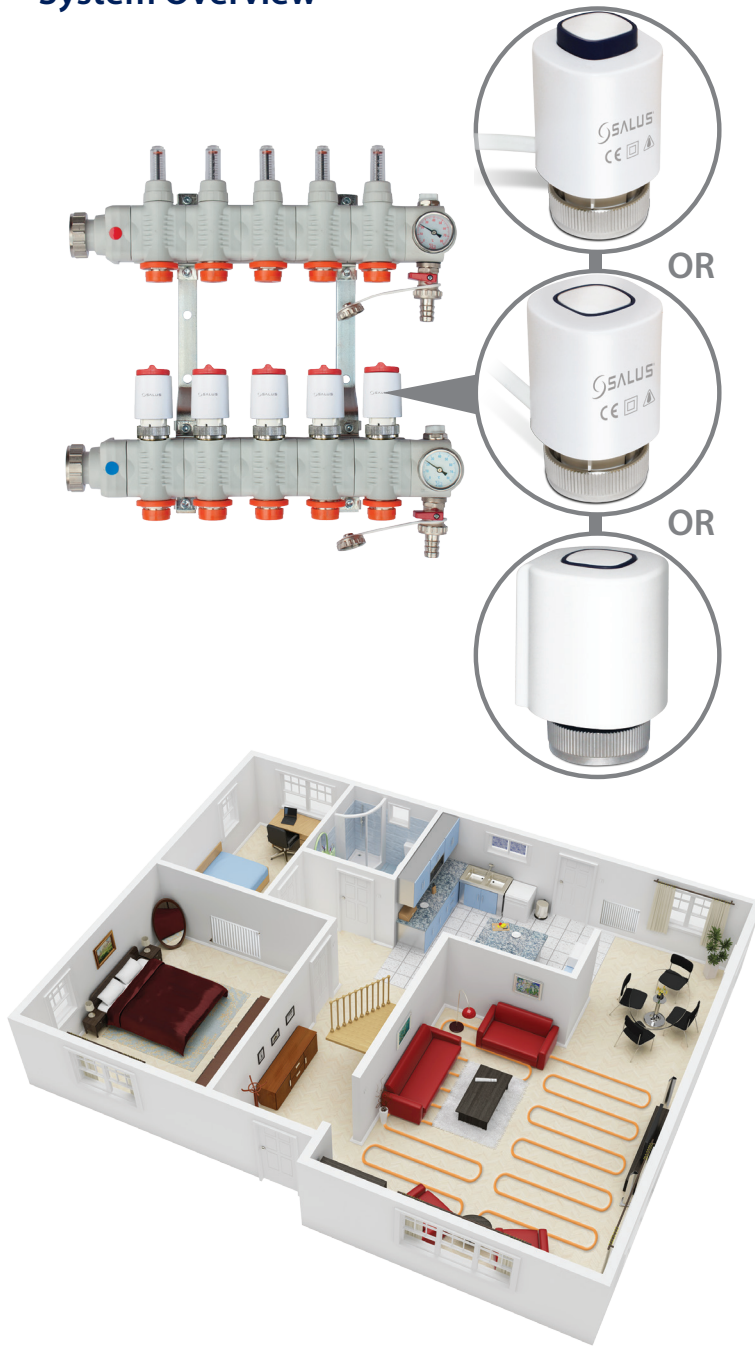

Specifications

Indicators			
Mechanical State Indicator Cap			
Connections	A30NO24	A30NC24	A30NC24EW
Power: 24 VAC 50/60 Hz			
max. inrush	200 mA	200 mA	200 mA
max. operating	90 mA	105 mA	90 mA
End Switch: 5 (1) A	-	-	√
Mechanical			
Valve Mount: M30 x 1.5	√	√	√
Power Cable: 0.9m	√	√	
Power / End Switch Cable: 0.9m			√
Weight	4.6 oz, 130 g	4.6 oz, 130 g	6.3 oz, 179g
Dimensions	1.5" x 2.7" x 1.5"	1.5" x 2.7" x 1.5"	1.7" x 2.9" x 1.8"
	39 x 69 x 39 mm	39 x 69 x 39 mm	44 x 73 x 46 mm
Environmental			
Operating: 14 - 158°F, -10 - 70 °C, 5 - 95% RH, non-condensing			
Storage: -13 - 140°F, -25 - 60 °C, 5 - 95% RH, non-condensing			
Warranty			
5 years limited warranty			
Compatible Devices			
AKL08 – Relay Controller, 8 zone			
AKL08RF – Wireless Relay Controller, 8 zone			

Order Details / Contact

Model Name: Thermal Actuators

Model	Single Unit UPC	Carton GTIN
A30NC24	817852020106	10817852020103 (20 pcs)
A30NC24EW	817852020113	10817852020110 (20 pcs)
A30NO24	817852020120	10817852020127 (20 pcs)

Tel: 1.650.360.1725

Email: sales@salusinc.com

SALUS NORTH AMERICA, INC.
850 Main Street
Redwood City, CA 94063
www.salusinc.com

