Wired Remote Controller
7 Day Programmable

Model: KSACN0401AAA

Submittal Data

Job Data: _____ Location: _____

Buyer: _____ Buyer P.O. #: _____ Carrier #: _____

Unit Number: _____ Model Number: _____

Performance Data Certified By: _____ Date: _____

Features

- LCD Display
- Malfunction code display
- 4-wire quick connect
- Room temperature display
- °F/°C Convertible
- Clock

Functions

- Weekly Schedule
- Mode: Auto-Cool-Dry-Heat-Fan
- Fan Speed: Auto/Low/Med/High speed
- Swing (on some models)
- Timer ON/OFF
- Temperature Setting
- *Follow Me* Function
- Child Lock

Parts included:

☐**Wired Controller**　　　　　☐Installation and owner's manual　　　　　☐Plastic Screw Bars
☐**Adapter Board**　　　　　　☐Screws M4X20　　　　　　　　　　　　　☐Battery
☐**Display Board**　　　　　　☐Wall Plugs　　　　　　　　　　　　　　☐**Connection Cable 19 ft (6m)**

Note: Extension wire available through RCD. **Part Number: 17401204000769**

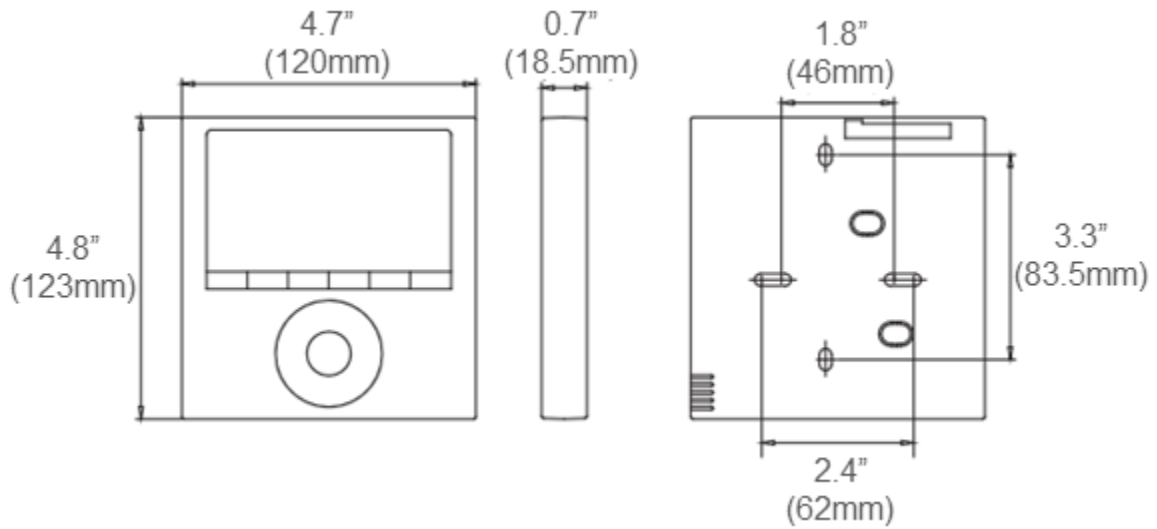## *Specification:*

Input Voltage	DC 5V
Ambient Temperature	23 ~ 110°F (-5 - 43°C)
Ambient Humidity	40%RH ~ 90%RH

Wiring Specification:

Wiring Type	Size	Maximum Length
Sheathed vinyl cord or cable	16 – 18AWG (0.75 – 1.25mm^2)	66ft (20m)

Construction View
KSACN0401AAA

4.7" (120mm)

0.7" (18.5mm)

1.8" (46mm)

4.8" (123mm)

3.3" (83.5mm)

2.4" (62mm)

Termination View

Display board

Adapter board

The connection cable

CN101

4-core shielding wire

red				red
black				black
yellow				yellow
brown				brown

Insert of the Display Board CN101

Wire controller

4-Core Shield Cable, the length is decided by installation

Indoor unit Display Board