

CONDENS**SAFE**[™]

QUALITY

INNOVATION



RELIABILITY

CONDENSATE NEUTRALIZER

CONDENS**SAFE** IS AN OUTSTANDING INNOVATION IN THE CONDENSATE NEUTRALIZER DOMAIN.

The unit is divided in three sections and the engineered media is contained in bags that you can replace easily when needed. These media bags are the only ones in the industry to have date labels so the user knows exactly when it's time to replace them.

Use only the sections you need! As the unit is divided in three sections, you can place one, two, or three bags in the unit, depending on the volume of condensate that needs to be treated.

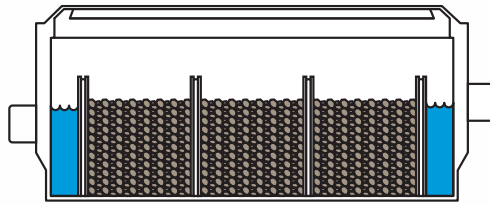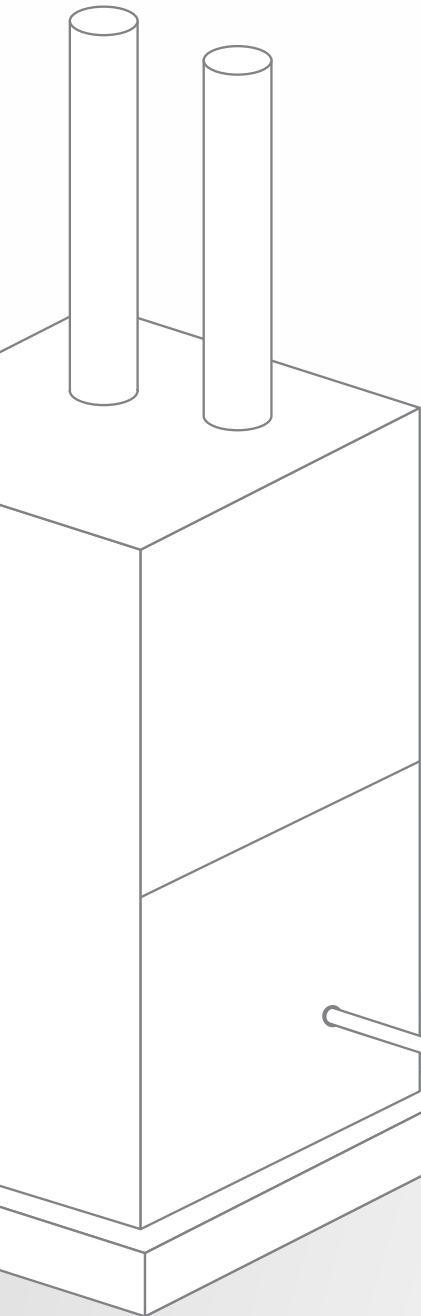


Model CS6A (6.3 GPH / 24 LPH) shown



FEATURES

- 1 No by-pass necessary
- 2 No messy media replacement
- 3 No disconnection needed to replace media
- 4 The only condensate neutralizer that can be hard piped
- 5 Dated media in a bag



Engineered media in bags

SPECIFICATIONS

MODEL	LENGTH		WIDTH		HEIGHT		INLET/ OUTLET	SIZING												UNIT MAX CONDENSATE FLOWRATE*		
									1 SECTION TREATS				2 SECTIONS TREAT				3 SECTIONS TREAT					
	in	cm	in	cm	in	cm		MBH	kWh	gal/h	L/h	MBH	kWh	gal/h	L/h	MBH	kWh	gal/h	L/h			
CS6A Box	12	30.5	4 ¾	12	5 ½	14	½" FNPT	525	154	2.1	8	1050	308	4.2	16	1575	461	6.3	24	6.3 GPH (24 LPH)		

*Verify condensate flowrate on your appliance. In general, 500,000 BTU/hr at 92% efficiency should generate around 1.6 Gal/hr

ECONOMICAL

- Replaceable engineered media bag (CSM2)
- The three sections configuration allows a wide range of flow rates so you can use only the sections you need
- Long-life heavy duty tank and cover

ENVIRONMENT FRIENDLY

- Dispose an environment friendly neutralized condensate.



CLEAN

- No more dirty media replacement: engineered media is contained in an easy replaceable bag
- Brackets are provided to fix the unit to the wall

Dated media: Allows you to replace it only when needed! Preserve your drain from corroding.



PROVIDED WITH

- 1 media bag (CSM2)
- 1 set of wall bracket (CSB)
- Two ½" MNPT x ¾" hose barbed fittings
- Two ½" MNPT x ¾" glued fittings

OPTION

- 10 feet of flexible hose AND two 1/2" MNPT x 1/2" barbed fittings with two 5/8" clamps (#CSHK)
- Additional media bag(s) (# CSM2)
- pH test strips (30 strip) + indicator (#CSPH)

Calefactio Solutions inc.
Blainville, Qc

calefactio.com
info@calefactio.com

