



325 COMMERCE DRIVE
 MT VERNON, OH 43050
 800-253-8236

SPECIFICATION DATA SHEET


DATE: 5-28-13
 PREPARED BY: RL

MODEL NO. 603
SADDLE TEE W/GASKET
 STANDARD MODEL

DIMENSIONS

SIZE

A	Min Ø B	Max Ø B	C
4"	on 6"	to 9"	3"
4"	on 10"	to 20"	3"
5"	on 7"	to 10"	3"
5"	on 12"	to 20"	3"
6"	on 6"	to 7"	3"
6"	on 8"	to 9"	3"
6"	on 10"	to 20"	3"
7"	on 7"	to 8"	3"
7"	on 9"	to 12"	3"
7"	on 14"	to 20"	3"
8"	on 10"	to 12"	3"
8"	on 14"	to 20"	3"
9"	on 12"	to 14"	3"
10"	on 12"	to 14"	3"
10"	on 16"	to 20"	3"
12"	on 14"	to 16"	3"
14"	on 16"	to 18"	3"
16"	on 22"	to 26"	3"

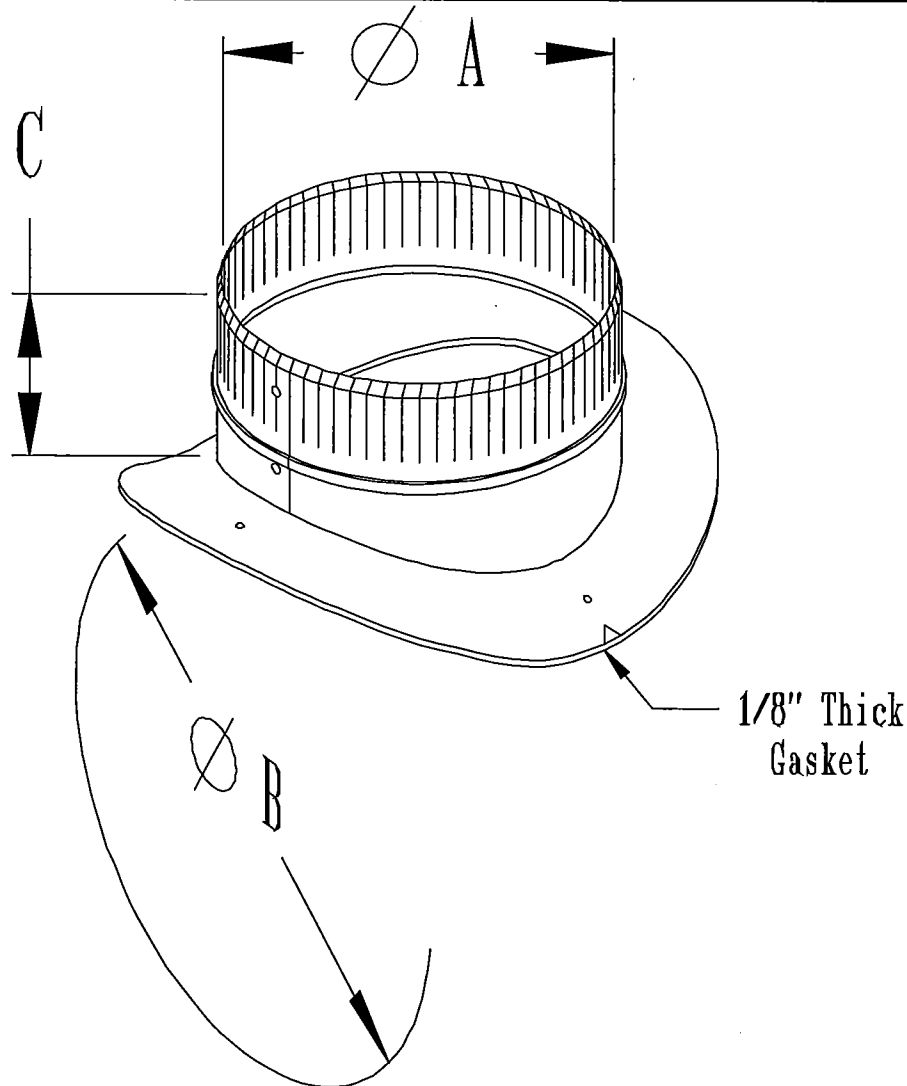

MATERIAL SPECIFICATIONS

HOT DIPPED GALVANIZED STEEL.
 PER ASTM A 653 CSB.

ASSEMBLED WITH 1/8" ZINC COATED RIVETS

BODY & RING: 4" - 8" = STD GAUGE MINIMUM
 BODY & RING: 9" - 16" = 28 GAUGE MINIMUM

GASKET IS CROSSLINKED POLYETHYLENE.

OPTIONS

AVAILABLE WITH DAMPER HOLES

JOB: _____
 LOCATION: _____
 CONTRACTOR: _____
 ENGINEER: _____
 NOTES: _____