



DOUBLE SHAFT FAN PERMANENT SPLIT CAPACITOR

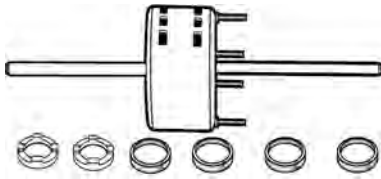

- Rated continuous air over
- Automatic thermal protection
- Extended thru-bolts
- Doubleshaft, 1/2" Dia., 8" each side
- Class B insulation
- 20" leads
- Furnished without run capacitor
- Length adapter kit included to facilitate mounting in cradle type base.




| PART NO | HP | VOLTS | PH | HZ | FLA | THER | RPM | SPD | ROTAT | BRGS | FRM | SHAFT POS | SHAFT DIA | SHAFT LENGTH | DIA | A | CAPACITOR MFD/VOLT |
|-----------|-----|---------|----|----|-----|------|------|-----|-------|------|-----|-----------|-----------|--------------|-----|------|--------------------|
| P257-8651 | 1/6 | 115 | 1 | 60 | 2.4 | AUTO | 1075 | 3 | CCW | SLV | 48Y | ALL | 1/2 | 8.0/8.0 | 5.6 | 20.0 | 5/370 |
| P257-8652 | 1/6 | 208-230 | 1 | 60 | 1.0 | AUTO | 1075 | 3 | CCW | SLV | 48Y | ALL | 1/2 | 8.0/8.0 | 5.6 | 20.0 | 5/370 |
| P257-8671 | 1/4 | 115 | 1 | 60 | 3.7 | AUTO | 1075 | 3 | CCW | SLV | 48Y | ALL | 1/2 | 8.0/8.0 | 5.6 | 20.0 | 5/370 |
| P257-8672 | 1/4 | 208-230 | 1 | 60 | 1.7 | AUTO | 1075 | 3 | CCW | SLV | 48Y | ALL | 1/2 | 8.0/8.0 | 5.6 | 20.0 | 5/370 |
| P257-8872 | 1/4 | 208-230 | 1 | 60 | 1.2 | AUTO | 1625 | 3 | CCW | SLV | 48Y | ALL | 1/2 | 8.0/8.0 | 5.6 | 20.0 | 5/370 |
| P257-8682 | 1/3 | 208-230 | 1 | 60 | 2.5 | AUTO | 1075 | 3 | CCW | SLV | 48Y | ALL | 1/2 | 8.0/8.0 | 5.6 | 20.0 | 5/370 |
| P257-8882 | 1/3 | 208-230 | 1 | 60 | 1.9 | AUTO | 1625 | 3 | CCW | SLV | 48Y | ALL | 1/2 | 8.0/8.0 | 5.6 | 20.0 | 5/370 |
| P257-8692 | 1/2 | 208-230 | 1 | 60 | 3.5 | AUTO | 1075 | 3 | CCW | SLV | 48Y | ALL | 1/2 | 8.0/8.0 | 5.6 | 20.0 | 7.5/370 |
| P257-8892 | 1/2 | 208-230 | 1 | 60 | 3.0 | AUTO | 1625 | 3 | CCW | SLV | 48Y | ALL | 1/2 | 8.0/8.0 | 5.6 | 20.0 | 5/370 |

BLOWER TOTALINE®

BELTED SPLIT PHASE




- NEMA Service Factors
 - Open drip-proof construction
 - 40°C ambient
 - Reversible rotation by electrical reconnection
 - Class A insulation - 1/6 thru 1/2 H.P.
 - Class B insulation - 3/4 thru 1 H.P.
 - All 5/8" dia. shaft motors are keyed.
- The following motors mounting holes are combination 48 & 56, shaft height is 3.0", includes 5/8" dia. shaft adapter:
 • P267-9305 • P267-9758 • P267-9308




| PART NO | HP | VOLTS | PH | HZ | FLA | SF | THERM | RPM | SPD | ROTAT | BRGS | FRM | SHAFT | SHAFT | DIA | A | C |
|-----------|-----|---------|----|----|---------|------|-------|------|-----|-------|------|-------|-------|-------|-----|-----|-----|
| P267-9305 | 1/4 | 115 | 1 | 60 | 4.4 | 1.35 | AUTO | 1725 | 1 | REV | SLV | 48(R) | 1/2 | 1.5 | 5.6 | 9.4 | 3.0 |
| P267-9308 | 1/3 | 115 | 1 | 60 | 5.4 | 1.35 | AUTO | 1725 | 1 | REV | SLV | 48(R) | 1/2 | 1.5 | 5.6 | 9.9 | 3.0 |
| P267-9309 | 1/3 | 230 | 1 | 60 | 2.7 | 1.35 | AUTO | 1725 | 1 | REV | SLV | 48(R) | 1/2 | 1.6 | 5.7 | 9.9 | 3.0 |
| P267-9758 | 1/2 | 115 | 1 | 60 | 7.9 | 1.25 | AUTO | 1725 | 1 | REV | BALL | 48(R) | 1/2 | 1.5 | 5.6 | 9.9 | 3.0 |
| P267-9392 | 1/2 | 115 | 1 | 60 | 8.0 | 1.25 | AUTO | 1725 | 1 | REV | SLV | 56(R) | 5/8 | 2.0 | 6.5 | 9.8 | 3.5 |
| P267-D136 | 1/2 | 115/230 | 1 | 60 | 8.0/4.0 | 1.25 | AUTO | 1725 | 1 | REV | SLV | 56(R) | 5/8 | 2.0 | 6.5 | 9.8 | 3.5 |
| P267-D231 | 3/4 | 115 | 1 | 60 | 11.8 | 1.25 | AUTO | 1725 | 1 | REV | SLV | 56(R) | 5/8 | 2.0 | 6.5 | 9.8 | 3.5 |
| P267-D232 | 3/4 | 230 | 1 | 60 | 5.6 | 1.25 | AUTO | 1725 | 1 | REV | SLV | 56(R) | 5/8 | 2.0 | 6.5 | 9.8 | 3.5 |

CAPACITOR START



- NEMA Service Factors
- Resilient mount
- Open drip-proof construction
- 40°C ambient
- Class A insulation - 1/2 H.P.
- Class B insulation - 3/4 and 1 H.P.
- Reversible rotation by electrical reconnection



| PART NO | HP | VOLTS | PH | HZ | FLA | SF | THERM PROT | RPM | SPD | ROTAT | BRGS | FRM | SHAFT DIA | SHAFT LEN | DIA | A | C |
|-----------|-----|---------|----|----|----------|------|------------|------|-----|-------|------|-----|-----------|-----------|-----|------|-----|
| P268-E223 | 1/2 | 115/230 | 1 | 60 | 8.6/4.3 | 1.25 | AUTO | 1725 | 1 | REV | BALL | 56 | 5/8 | 2.0 | 5.6 | 9.3 | 3.5 |
| P268-E231 | 3/4 | 115/230 | 1 | 60 | 11.4/5.7 | 1.25 | AUTO | 1725 | 1 | REV | BALL | 56 | 5/8 | 2.0 | 5.6 | 10.8 | 3.5 |
| P268-E236 | 1 | 115/230 | 1 | 60 | 13.0/6.5 | 1.15 | AUTO | 1725 | 1 | REV | BALL | 56 | 5/8 | 2.0 | 6.2 | 11.8 | 3.5 |