

INDOOR UNIT



SPECIFICATIONS

Ventilation Type:
Static plate, heat and humidity transfer

Typical Airflow Range: 150-300 CFM

Standard Features:
Painted cabinet
Line-cord power supply
Low-voltage circuit for controls
Unit may be mounted in any orientation

Controls:
On board 24 VAC transformer/relay package with switched dry contacts

Filters:
Total qty. 2, MERV 8, spun-polyester media:
10 1/2" x 21 3/4" x 1"

Unit Dimensions & Weight:
33 3/4" L x 24" W x 20" H
72 lbs.

Max. Shipping Dimensions & Weight (on pallet):
34" L x 44" W x 34" H
115 lbs.

Motor(s):
Qty. 1, Double-shaft standard motor

Accessories:
Backdraft damper 8"
Wall cap 8" - taupe plastic, galvanized, paintable galvanized
Louver with 8" round duct connection - 12" (W) x 8" (H)
Percentage timer control (PTL)
Push-button point-of-use controls (PBL), PTL req'd.
Percentage timer control with furnace interlock (FM)
Electric duct heater - EK series (1-60 kW)

ELECTRICAL DATA

HP	Volts	HZ	Phase	Input Watts	FLA
0.2	120	60	Single	315 @ 297 CFM	3.3

UNIT PERFORMANCE

Airflow CFM	ESP in H ₂ O	Temp EFF%	Total EFF% Winter/Summer*
170	1.0	78	73/59
191	0.9	77	71/57
215	0.8	75	69/55
256	0.7	73	66/51
277	0.6	71	65/49
295	0.5	70	63/47
311	0.4	69	62/46

CORE PERFORMANCE

* See HVI certification ratings on page 135 of RenewAire's Full Line Volume XVI Catalog.


UNIT DIMENSIONS




AIRFLOW CONFIGURATION
Available as shown in dimension drawing.




UNIT MOUNTING & APPLICATION
Can be mounted in any orientation. RA/EA airstream can be switched with OA/FA airstream.

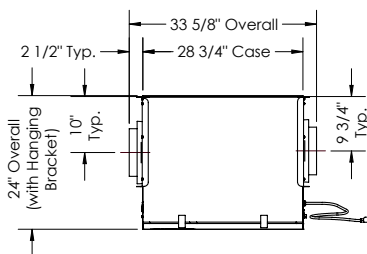


TOP VIEW

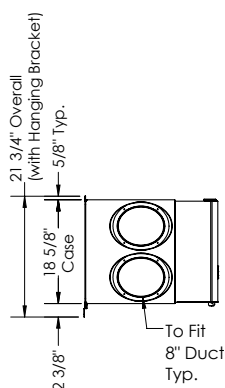

LEFT VIEW

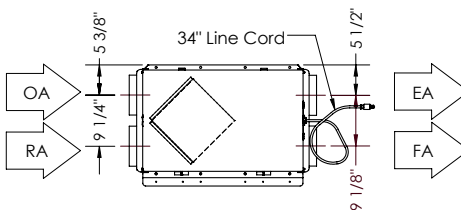

FRONT VIEW

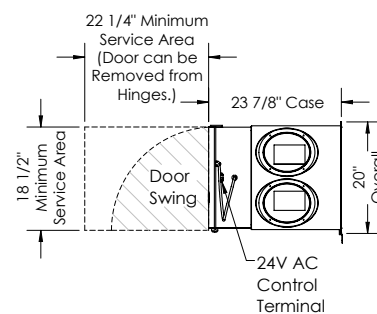

RIGHT VIEW

ABBREVIATIONS
EA: Exhaust Air to outside
OA: Outside Air intake
RA: Room Air to be exhausted
FA: Fresh Air to inside

INSTALLATION ORIENTATION
Unit may be installed in any orientation.

NOTE
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE ROUNDED TO THE NEAREST EIGHTH OF AN INCH.
2. SPECIFICATIONS MAY BE SUBJECT TO CHANGE WITHOUT NOTICE.

Specifications may be subject to change without notice.