

# High Wall Heat Pump Ductless System



Indoor Model: **40MHHAQ30XA3**

## Submittal Data

Job Data:  Location:

Buyer:  Buyer P.O. #:  Carrier #:

Unit Number:  Model Number:

Performance Data Certified By:  Date:



### STANDARD FEATURES:

- Available in 208/230V (9-36K)
- Available in 115V (9K-12K)
- Modes: Cool, Heat, Dry, Fan, Auto
- Turbo Mode
- Fully Modulating fan speeds
- Up-Down / Right-Left Louver control (fixed or swing)
- ECO Mode
- Heating Setback (46° F Heating Mode)
- Anti-corrosive fin coatings

### CONTROLS:

- Wireless Remote Controller included with indoor unit

System	Size	30	
	Indoor Model	40MHHAQ30XA3	
Electrical	Voltage, Phase, Cycle	V/Ph/Hz	208/230-1-60
	Power Supply	Indoor unit powered by outdoor unit	
	MCA	A.	0.625
Controls	Wireless Remote Controller (°F/°C Convertible)	Standard	
	Wired Remote Controller (°F/°C Convertible)	Optional	
Operating Range	Cooling Indoor DB Min -Max	°F(°C)	63~90 (17~32)
	Heating Indoor DB Min -Max	°F(°C)	32~86 (0~30)
Piping	Pipe Connection Size - Liquid	in (mm)	3/8 (9.52)
	Pipe Connection Size - Suction	in (mm)	5/8 (16)

Indoor Coil	Face Area	Sq. Ft.	3.90
	No. Rows		3
	Fins per inch		20
	Circuits		7
Indoor	Unit Width	in (mm)	49.57 (1259)
	Unit Height	in (mm)	14.25 (362)
	Unit Depth	in (mm)	11.14 (283)
	Net Weight	lbs (kg)	42.99 (19.5)
	Number of Fan Speeds		4
	Airflow (lowest to highest)	CFM	380/536/702/741
	Sound Pressure (lowest to highest)	dB(A)	34/40/44/50
	Air throw Data	ft (m)	29.8 (9.1)
	Moisture removal	Pint/h (L/h)	7.9 (3.73)
Field Drain Pipe Size O.D.	in (mm)	5/8 (16)	



Performance may vary based on the outdoor unit matched to. See compatible outdoor units pages for Performance Data.  
For Compatibility See Product Data

## Accessories

KSACN0901AAA	Wired Remote Control 7 Day Programmable
KSACN0101AAA	Wired Remote Control with Timer Function
KSAIF0601AAA	Wi-Fi™ Kit High Wall Mid-Tier
KSAIC0301230	24V Interface Kit 230V

## Construction View

Indoor Model: **40MHHAQ30XA3**

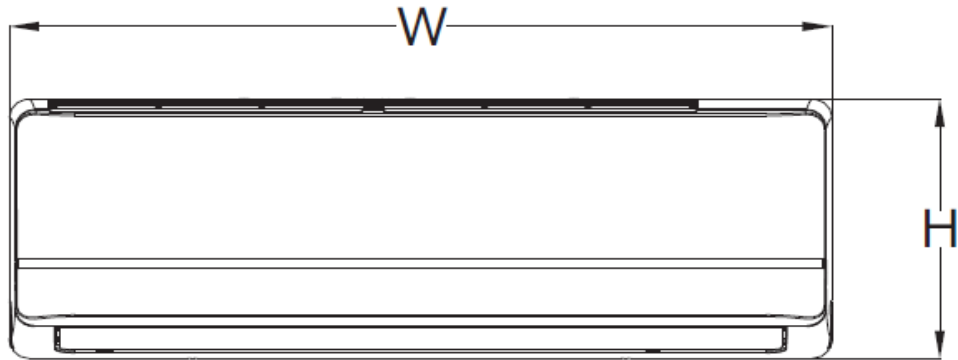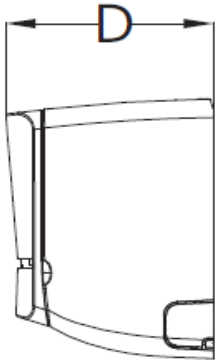

Unit Width	in (mm)	49.57 (1259)
Unit Height	in (mm)	14.25 (362)
Unit Depth	in (mm)	11.14 (283)
Net Weight	lbs (kg)	42.99 (19.5)

