


INSTALLATION INSTRUCTIONS

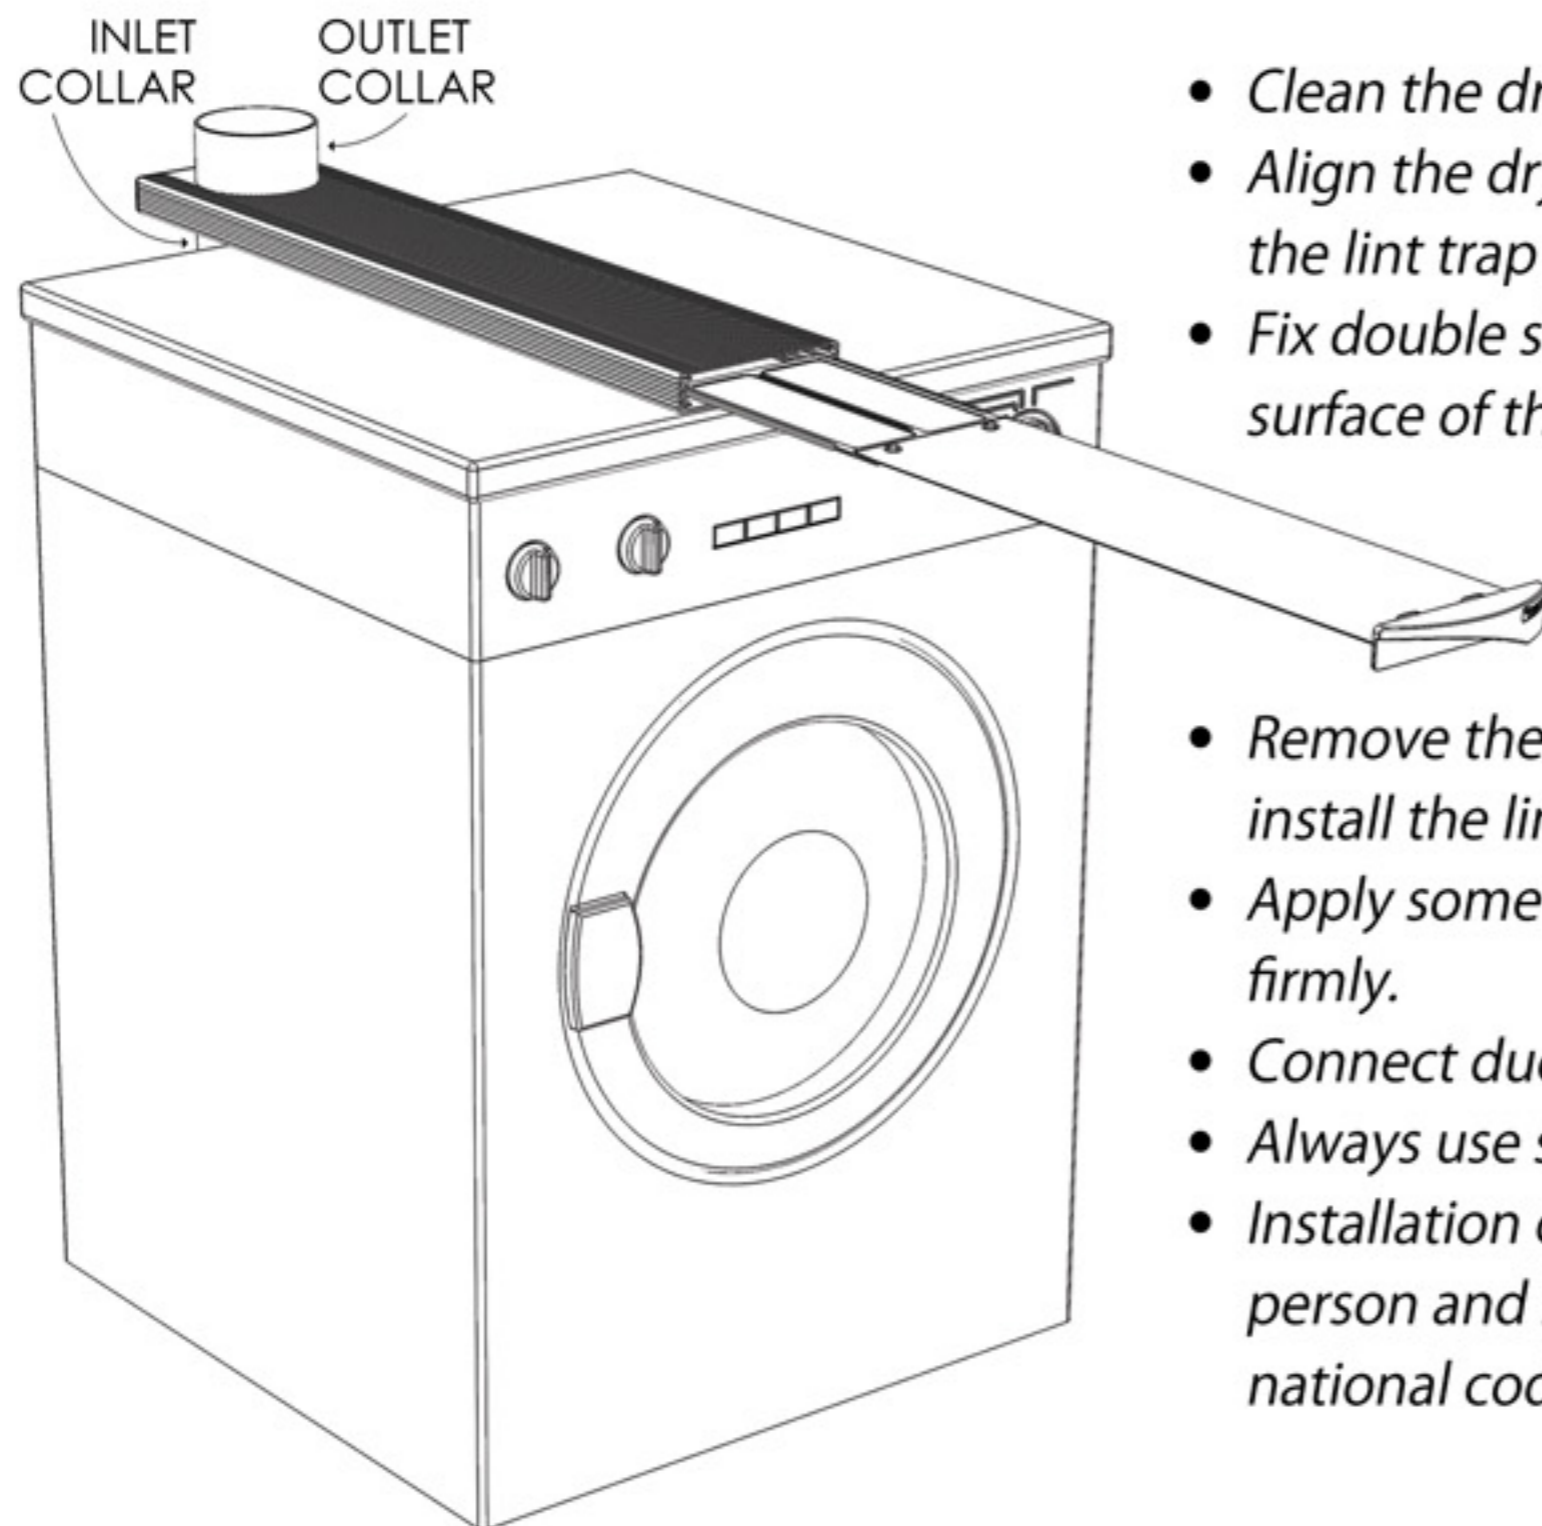

- Clean the dryer top surface properly before installation.
- Align the dryer exhaust with the lint trap collar and mark the lint trap position on the top of the dryer.
- Fix double sided foam tape (not supplied) on the bottom surface of the lint trap.
- Remove the remaining side of the foam tape strips and install the lint trap on the dryer top surface as marked.
- Apply some force downwards on the lint trap to hold it firmly.
- Connect duct to inlet and outlet collar.
- Always use solid metal pipe.
- Installation of the lint trap must be done by a qualified person and be in accordance with all municipal and national codes and standards.

IMPORTANT: CLEAN LINT TRAP BEFORE EVERY DRYER CYCLE