



Pioneering for You

wilo®

Product Brochure - 60 Hz

## Wilo-Star E 21

EC Motor-Driven, High-Efficiency, Wet-Rotor Circulator



StarE21\_100223



# EC Motor-Driven, High-Efficiency, Wet-Rotor Circulator

Wilco- Star E 21



## Applications

- Heating and cooling
- Industrial Circulation
- Water/Glycol concentrations up to 50%
- Solar
- Geothermal

**Max Head:** 20 feet


**Max. Flow:** 16.8 GPM

## Features & Benefits

- High-efficiency, EC Motor-driven technology
- Differential temperature control
- Auto mode: Automatically adjusts to the system demand
- Three HD modes –proportional control
- Four speed control
- LED display and adjustment buttons for easy set-up and changes
- Set Point Heat Mode
- Set Point Cool Mode
- Boiler Protection Mode

## Technical Data

- Fluid temperature range: 36°F to 230°F
- Maximum operating pressure: 145 PSI (10 Bar)
- Cast Iron HT200 pump body
- Composite PA66+30%GF impeller
- Ceramic shaft

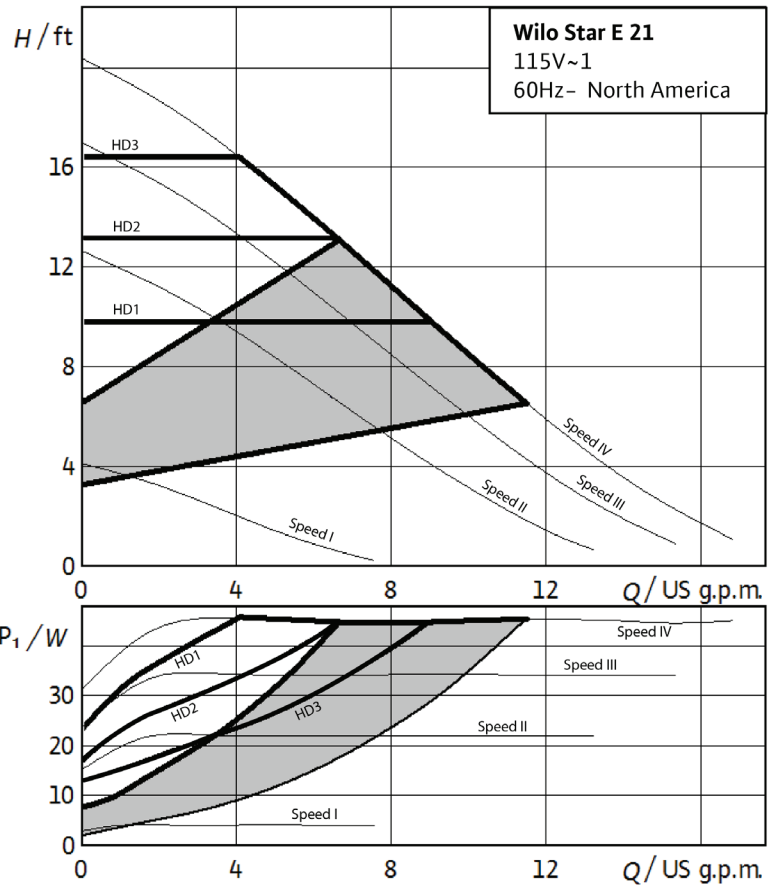

WILO USA LLC  
+1 (262) 204-6600  
info.us@wilo.com  
www.wilo-usa.com



**wilo**®