



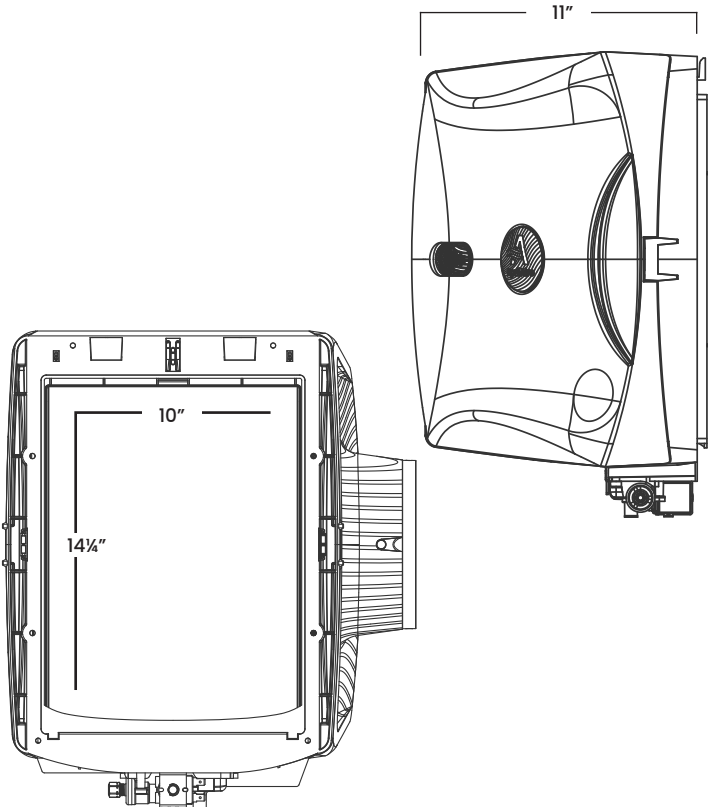

620 Series
Bypass Evaporative Humidifier

Project: _____ Dealer: _____
Architect: _____ Engineer: _____
Contractor: _____ Location: _____
Suppliers: _____ Date: _____

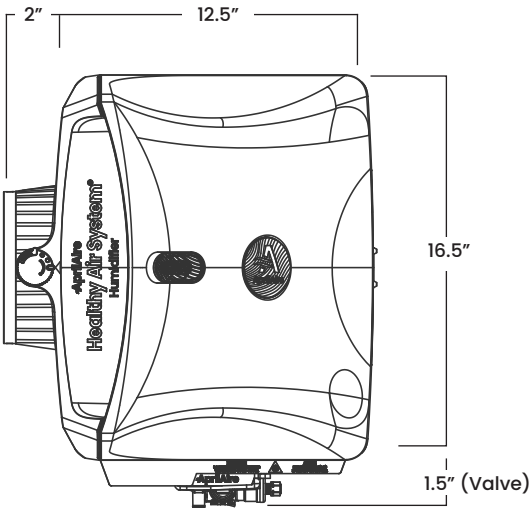

Specifications

Rated Evaporative Capacity:	18 GPD (0.75 GPH)
Rated Capacity Plenum Temperature*:	120°F
Water Feed Rate:	1.75 GPH
Required Water Temperature:	Up to 140°F
Required Supply Water:	Recommend soft or softened water or installing an inline scale reducing filter
Ambient Temperature Operating Range:	40°F - 140°F
Electric Characteristics:	
Water Valve:	24 VAC
Control Voltage:	24 VAC
Cabinet Construction:	Impact Resistant Polycarbonate
Cabinet Finish:	Gray/Blue
Shipping Weight:	10.5 lbs.
Safety Standards:	Listed to UL 998, CAN/CSA-C22.2 No. 104:20 - Humidifiers
Bypass Connection	6" Round

*Lower plenum temperature can reduce evaporative capacity

The submittal is intended to show general, overall product dimensions and provide guidance for installation clearance. Drawings are not to scale. Ensure submittals are current. AprilAire reserves the right to make product changes without notification or obligation.