

# AprilAire®

## Dehumidifier

### FEATURES

- Wi-Fi enabled digital control with color graphical display. Can be set up for dehumidification with the option of ventilation.
- Front mount control
- ½" EPS cabinet insulation
- Air discharge orientation at end of cabinet
- Washable MERV 8 filter (part number 5695) and 8" diameter inlet/outlet duct collars
- R32 refrigerant
- Corrosion-resistant aluminum coils
- 8' power cord (plug type); hardwire option not available
- 10°F–30°F discharge air temperature rise
- ¾" MNPT Threaded drain connection with adapters for threaded connection for plastic hose included
- Remote access and control over Wi-Fi
- 10' drain tubing
- 5-year warranty

### SPECIFICATIONS

<b>Capacity</b>	@ 80°F/60% RH @ 73°F/60% RH	70 ppd 53 ppd
<b>Energy Factor kW-h</b>	@ 80°F/60% RH @ 73°F/60% RH	2.1 L/kW-h 1.8 L/KW-h
<b>Airflow @ varying E.S.P.</b> (external static pressure – dry coil)	0.0" w.c. 0.2" w.c. 0.4" w.c.	200 CFM 170 CFM 140 CFM
<b>Voltage, phase, frequency</b>	120VAC, 1 phase, 60 Hz	
<b>Current draw<sup>(1)</sup></b>	5.4 Amps	
<b>Noise</b>	53 dBA ducted	
<b>Wi-Fi</b>	Yes	
<b>Dimensions (cabinet only)<sup>(4)</sup></b>	Width: 12½", Height: 12½", Length: 25"	
<b>Unit Weight</b>	56 lbs.	
<b>Shipping Weight</b>	72 lbs.	
<b>Inlet air operating conditions during</b>	Dehumidification:	50°F–104°F, 40°F dew point min.
	Ventilation:	40°F–140°F, 0%–99% RH (non-condensing)

<sup>(1)</sup>Rated capacity, energy factor and current draw measured at 80°F/60% RH inlet air at 0.0 ESP.  
<sup>(4)</sup>Height does not include adjustable feet. The width excludes the filter doors and length excludes the duct collars.

### SPECIFICATION SHEET

## Model E070W

### Wi-Fi Dehumidifier



### PRINCIPLE OF OPERATION

The AprilAire Model E070W Wi-Fi Dehumidifier features Wi-Fi enabled technology which offers easy installation, setup, and pairing. Maintenance is made easy through reliable monitoring and enhanced product support. This allows for best-in-class user experience to solve moisture and high humidity.

The AprilAire E070W Crawl Space Wi-Fi Dehumidifier is designed to dehumidify the air coming into the unit by passing the incoming air over an evaporator coil to drop the air temperature below the dew point of the air. Moisture is removed from the air and drained out of the unit to a common floor or waste drain. The air is then reheated in the condenser coil and exits the unit.

Dehumidification occurs until the set point is reached, then shuts off until periodic sampling determines a need for operation.

### APPLICATION


The E070W Dehumidifier is the perfect solution for controlling humidity in crawl spaces; protecting against structural damage, pests and mold.

The AprilAire Model E070W Wi-Fi Dehumidifier offers:

- Turn-Key Provisioning: Built-in control w/bluetooth
- Intuitive Controls: Enhanced, digital interface and app integration for ongoing monitoring and maintenance
- Integration with AprilAire Healthy Air App for alerts, diagnosis, and updates

### CIRCULATION


The E070W can also be programmed to circulate the air within a crawl space. Circulating the air evens out relative humidity levels and temperature in the space, eliminating variations in the environment.

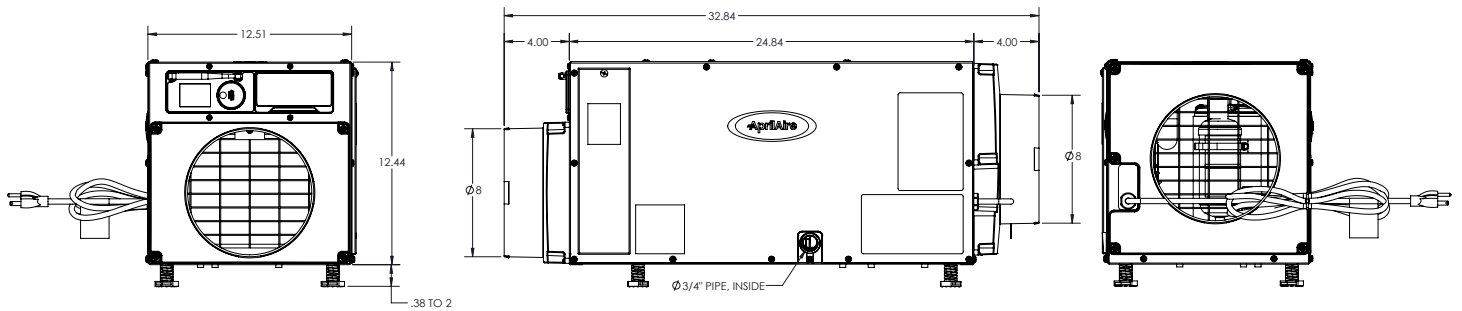

## INSTALL APPLICATION

### Inlet and Outlet Ducted

- Ducted with 8" flex duct or hard pipe.
- Helps circulate air to equalize humidity and temperature in the space.
- Can be used with the Model 5822 Hanging Kit for installations that require the unit to be off the floor.



## OPTIONAL ACCESSORIES



### Model 4856 Condensate Pump

- 22 ft. lift
- Low profile
- 120 V



### Model 5958 Condensate Pump Bracket

- Intuitive rail system
- No additional screws
- Threaded drain elbow



### Model 5822 Hanging Kit

- Simple pulley system installation
- Weight: 2.3 lbs.
- Supports 200 lbs.