



0026e™ ECM High-Efficiency Circulator

The 0026e™ is a high-performance, variable speed, wet-rotor circulator with high-efficiency ECM permanent magnet technology. With 5 easy settings, its variable speed performance curves are equivalent to the Taco 0010, 0011, 0012, 0012 3-Speed & 0014. Ideal for large residential and light commercial hydronic heating, chilled water cooling and domestic hot water systems.

The 0026e reduces power consumption by up to 85% compared to equivalent AC permanent split capacitor circulators. With a maximum of 26 feet of head and 44 gpm, it is available in either Cast Iron or NSF certified Stainless Steel.




Applications



APPLICATION:

- Maximum operating pressure: 150 psi (10.3 bar)
- Maximum fluid temperature: 230°F (110°C)
- Minimum fluid temperature: 14°F (-10°C)
- Electrical specifications:
 - Voltage: 115/208/230V, 50/60 Hz, single phase
 - Maximum operating power: 170W
 - Maximum amp rating: 1.0 (115V) / .50 (230V)
- Equipped with a cast iron or stainless steel casing
- Stainless Steel model suitable for open loop potable water systems
- Taco circulators are for indoor use only
- Acceptable for use with water or maximum of 50% water/glycol solution

Easy-to-use dial

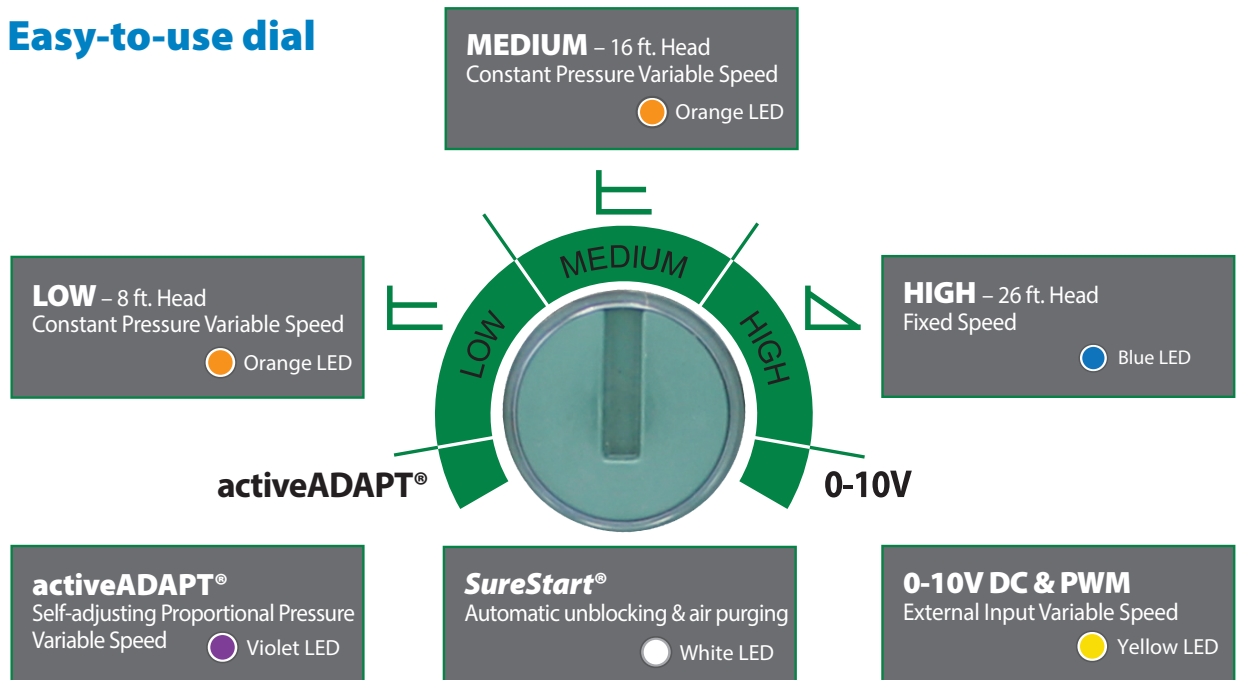

Features



FEATURES:

- 5 easy dial settings to match system requirements
 - activeADAPT®, LOW, MEDIUM, HIGH or 0-10V DC analog or PWM digital signal external input
- **BIO Barrier®** protects the pump from system contaminants
- **SureStart®** automatic unblocking and air purging mode
- Replaces all single speed and 3-speed circulators in its class
- Multi-color LED: power on, mode setting and error code diagnostics
- Use with a Taco ZVC Zone Valve Control or SR Switching Relay for ON/OFF operation
- Nut-grabber feature on flanges for easier fit up
- Dual electrical knockouts and removable quick-connect terminal strip for easy wiring
- Whisper quiet operation
- Rotatable control cover to simplify installation

Pump Replacement Chart (6-1/2" Flange-to-Flange Dimension)

Taco	Bell & Gossett	Armstrong	Grundfos	Wilo
2400-10	PL 50	E 13	UP 50-75	Stratos:
2400-20	PL 30	E 11	UPS 50-44	1.25 x 3 – 25
2400-30	Series e (e-601)	E 10	UP 43-75	1.25 x 3 – 20
2400-40	Series 60 (601)	E 7	UP(S) 26-99	
110	Series HV	S 25	UP 26-96	Top S:
111	Series PR	H 52	UP 26-64	1.25 x 15
112	Series HV	H 51	UPS 32-40	1.25 x 25
113	Series 100	H 32	UPS 32-80	1.50 x 20
0010	NRF 36	Astro 280	Magna 32-60	
0011	ECOCircXL 20-35	Astro 210	Alpha2 26-99	Top Z:
0012	ECOCirc XL 36-45	Compass ECM		1.5 x 15
0014				1.5 x 20

NOTE: Flange size and flange-to-flange dimensions will vary by competitive model and may require some piping changes.







Certified to
NSF/ANSI 61 & 372

Stainless Steel
Model Only

Performance Curves

activeADAPT® Mode:



activeADAPT is an operating mode designed for constant circulation systems. On this setting, the circulator will sense changes in system flow and head conditions and adjust the operating curve automatically.

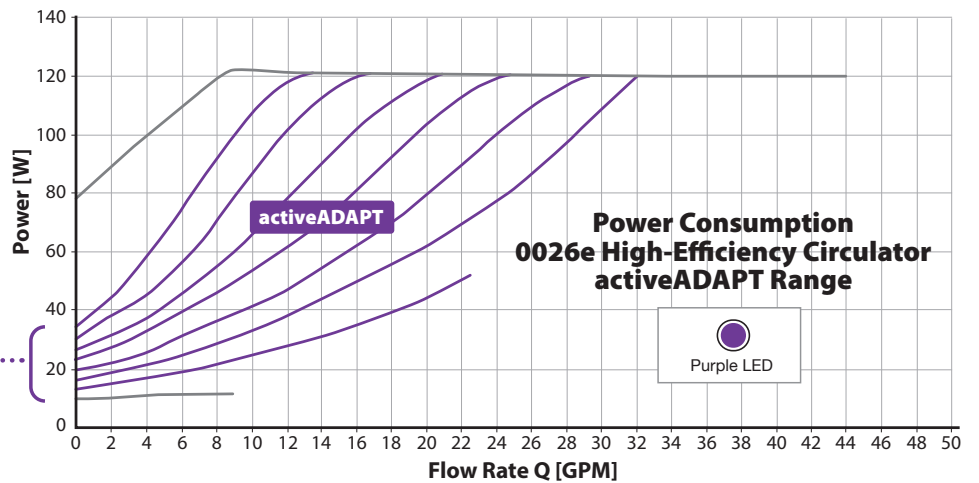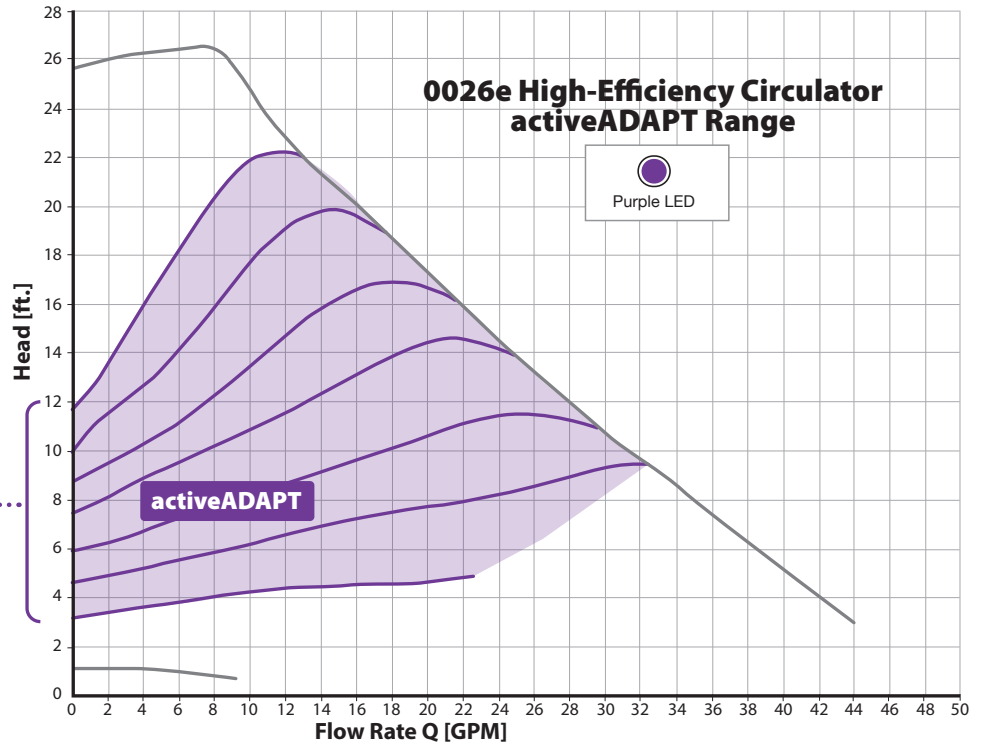

Performance Curves

Constant Pressure Mode:





At Low setting the circulator will vary speed to maintain 8 feet of head constant pressure. At Medium setting the circulator will vary speed to maintain 16 feet of head constant pressure.

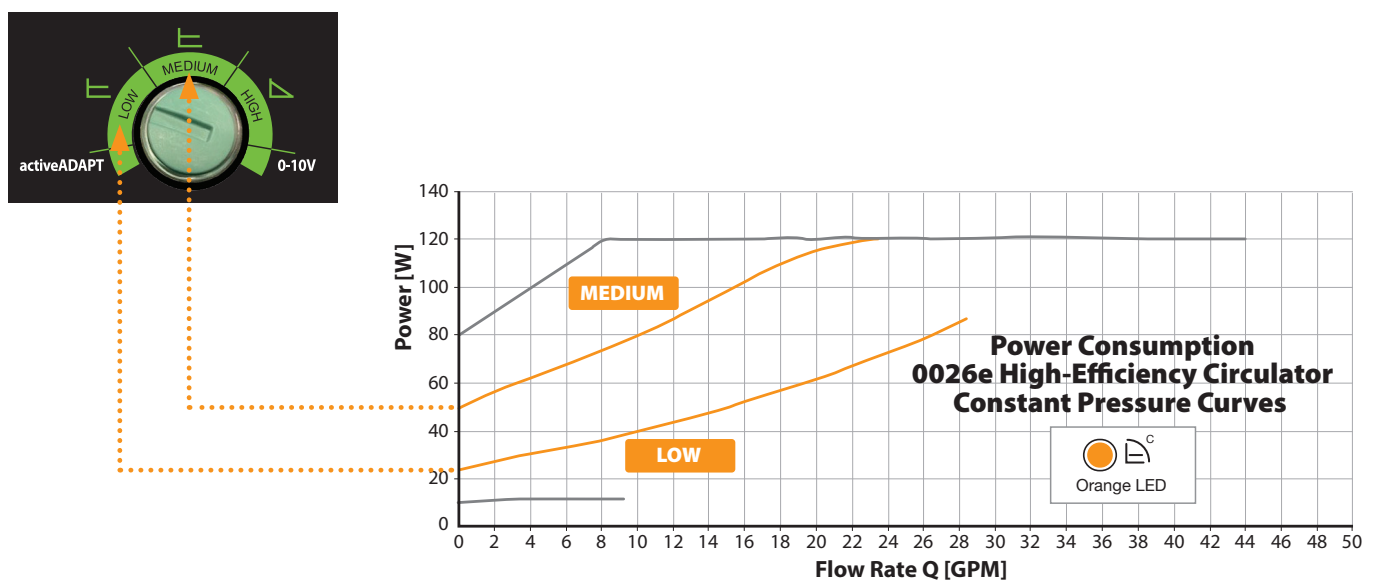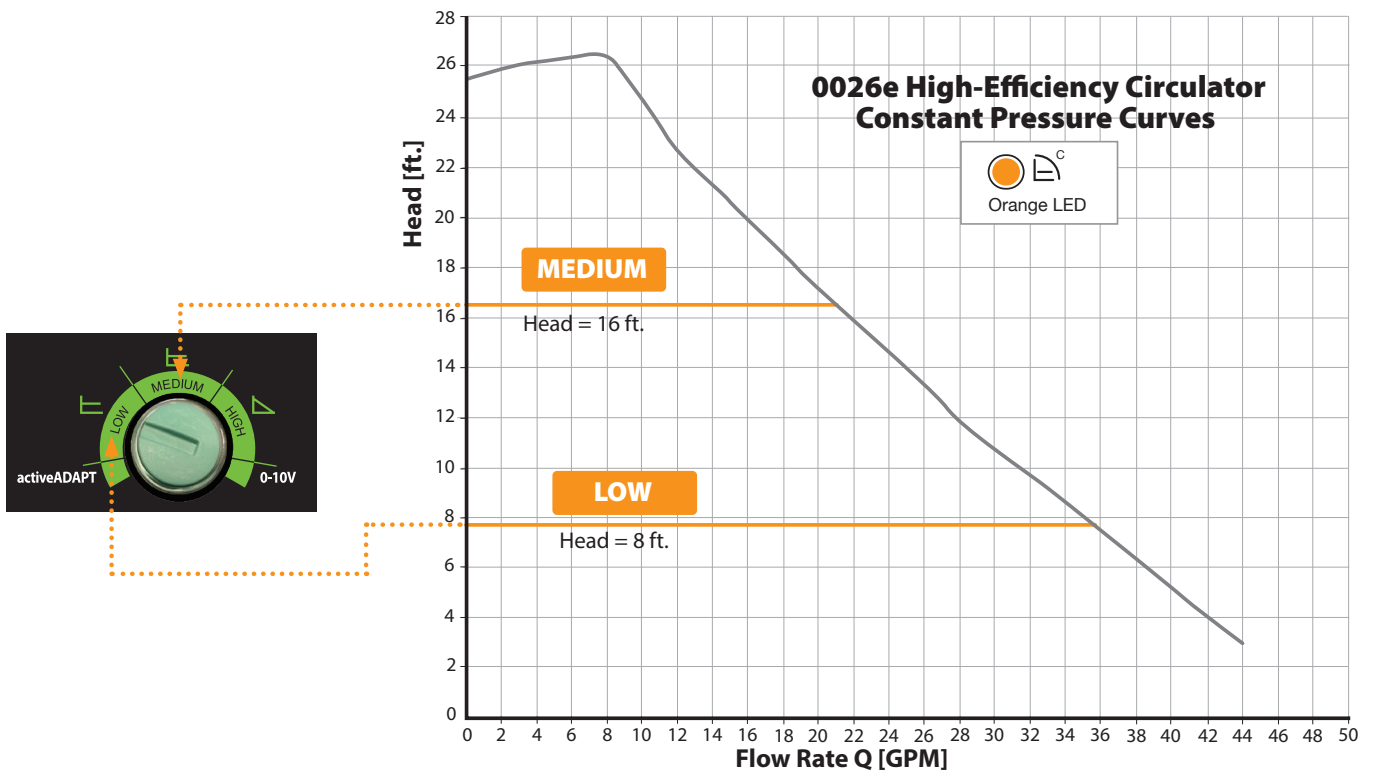

Performance Curves

Fixed Speed Mode:


At High setting the circulator always operates at full speed.

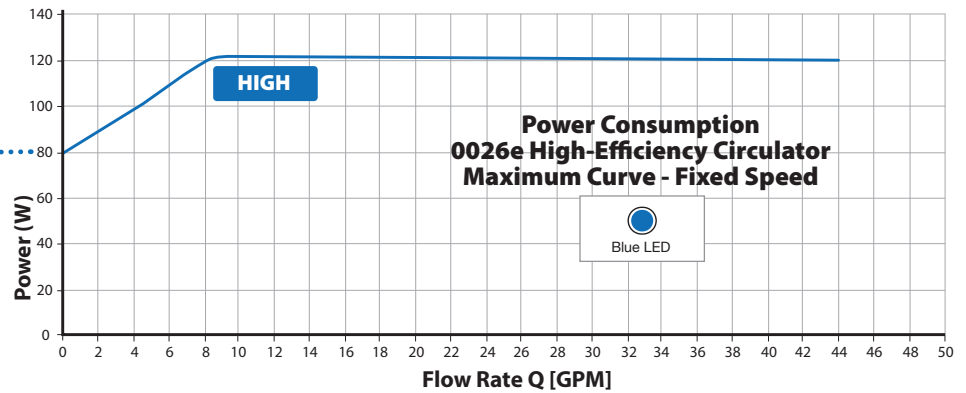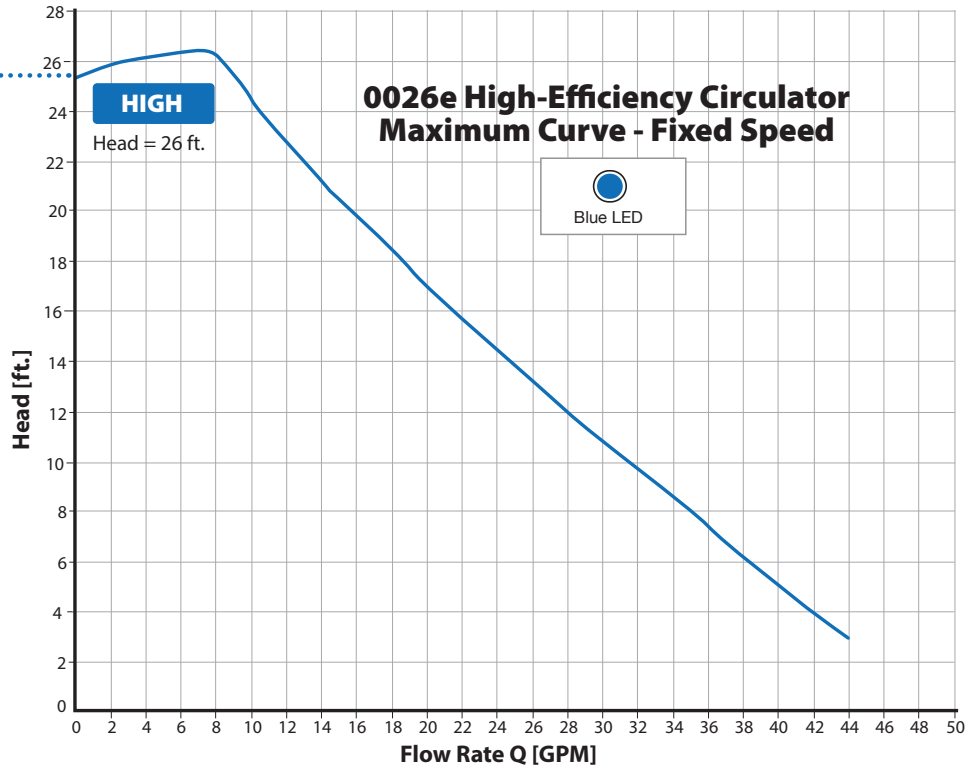

Performance Curves


0-10V DC or PWM External Input:

The circulator will vary its speed and performance based on a 0-10V DC analog or PWM digital signal external input.




0-10V

PWM (Pulse Width Modulation)

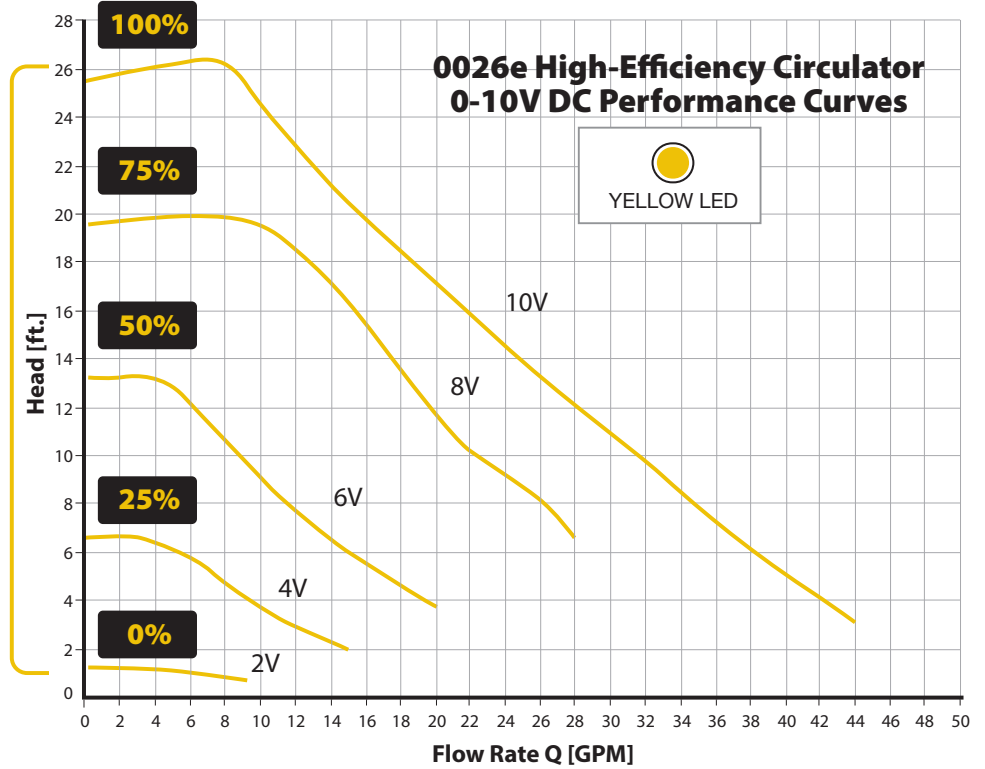

0-10V

Power Consumption 0026e High-Efficiency Circulator 0-10V DC Curves

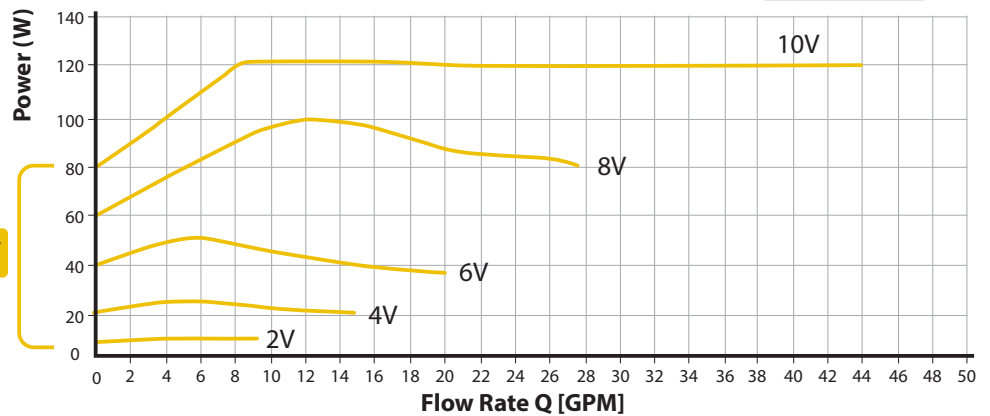

Submittal Data Information 0026e™ ECM Circulator

Submittal Data # 101-194
Supersedes: 08/16/21

Effective: 01/18/22

Specifications

- Maximum Shut-off Head: 26 feet
- Maximum Flow: 44 gpm
- Maximum Operating Pressure: 150 psi (10.3 bar)
- Maximum Water Temp: 230°F (110°C)
- Minimum Water Temp: 14°F (-10°C)
- Electrical specifications:
 - Voltage: 115V/208/230, 50/60 Hz Single phase
 - Operating Power Range: 10 - 120W
 - Max. AMP Rating: 1.0 (115V) - 0.50 (230V)
- Equipped with a Cast Iron or Stainless Steel casing
- Suitable for chilled water systems
- Stainless Steel model suitable for open loop potable water systems
- Taco circulators are for indoor use only
- Acceptable for use with water or maximum of 50% water/glycol solution
- 6.5" Flange to Flange dimension retrofits most circulators in its class


Materials of Construction:

Casing:Cast Iron or Stainless Steel
 Stator Housing:Composite
 Control Base:Composite
 Control Cover:Composite
 Cartridge:Composite
 Impeller:Composite
 Shaft:Ceramic
 Rotor:Neodymium
 Bearings:Ceramic
 Thrust Bearing:Carbon
 O-Ring & Gaskets:EPDM

Applications

Cast Iron Model: Closed loop, pressurized heating and chilled water HVAC systems
Stainless Steel Model: Open loop, potable water systems

The 0026e is a high-performance, variable speed, wet-rotor circulator with high-efficiency ECM permanent magnet technology. With 5 easy settings, its variable speed performance curves are equivalent to the Taco 0010, 0011, 0012, 0012 3-Speed & 0014. Ideal for large residential and light commercial hydronic heating, chilled water cooling and domestic hot water systems. The 0026e reduces power consumption by up to 85% compared to equivalent AC permanent split capacitor circulators.

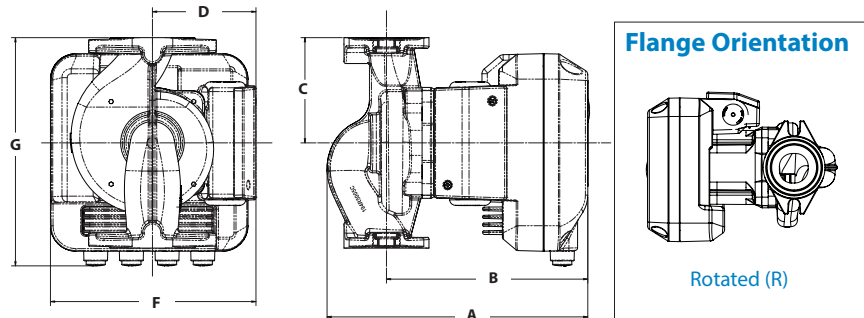


Pump Dimensions & Weights

Model Number	Casing	Flange Type	A	B	C	D	F	G	Wt.lbs. [kg]
			Inches [mm]						
0026e-F2	Cast Iron	R	8.05" [205]	6.22" [158]	3.25" [83]	3.20" [81]	6.22" [158]	7.05" [179]	10.5 [4.8]
0026e-SF2	Stainless Steel								

Electrical Data

Model	Volts	Hz	Ph	Max Amps	Watts	RPM
All Models	115/208/230	50/60	1	1	120	830 - 3800
Motor Type	ECM, Permanent Magnet, Electronically Protected					

Rotatable Control Cover to allow mounting in any orientation

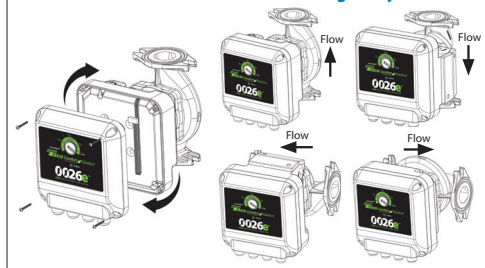


WAIP: 0.194

Model #: 0026e

CIRCULATOR PUMP CEI: 0.45 (ER 154)

ENERGY RATING



Note: The ER value is dependent on the selected control. Multiple options may be available on this pump, as follows:

- Full Speed
- Pressure (Rated)
- External Input Signal and Other Controls

Power savings (watts) over a baseline case can be estimated by multiplying the ER by WAIP and multiplying by 7.46. Multiplying power savings by operating hours and cost of energy will yield estimated cost savings.

4ZB91K

er.pumps.org

Apr 2021



Certified to NSF/ANSI 61 & 372

Stainless Steel Model



A Taco Family Company

Taco Inc., 1160 Cranston Street, Cranston, RI 02920 / (401) 942-8000 / Fax (401) 942-2360
 Taco (Canada) Ltd., 8450 Lawson Road, Unit #3, Milton, Ontario L9T 0J8 / (905) 564-9422 / Fax (905) 564-9436