




Dyna-Tite Cable Locks are for use with Duro Dyne wire rope only.



Dyna-Tite Cable Locks

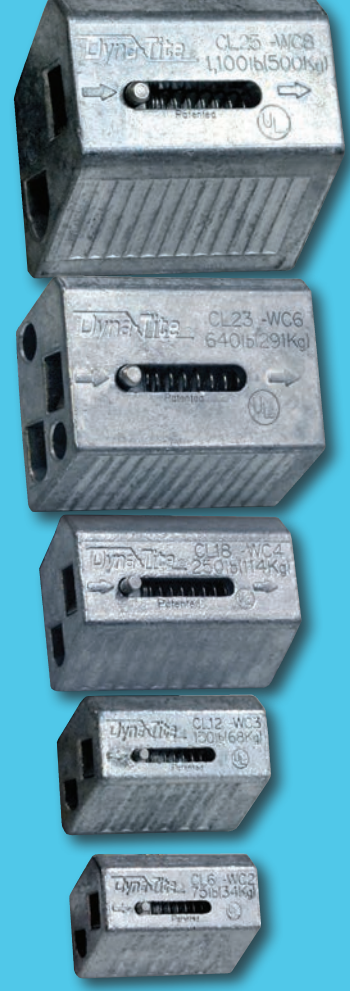

CL25-WC8

- Quick & easy to install
- No special tools or skills required
- Flexibility of installation
- External release pin



Patented

CL23-WC6

CL18-WC4

CL12-WC3

CL6-WC2

Working Load Limits		
Cable Lock	Wire Rope	Safe Working Load at 5:1 Safety Factor*
CL25-WC8	WC6-CL25	50-1, 100 lbs. (25-500 kg)
CL23-WC6	WC6-CL23	50-640 lbs. (25-291 kg)
CL18-WC4	WC4-CL18	25-250 lbs. (12-114 kg)
CL12-WC3	WC3-CL12	25-150 lbs. (12-68 kg)
CL6-WC2	WC2-CL6	10-75 lbs. (5-34 kg)

Item #	Code	Description	Carton Qty	Box Qty
30347	CL25-WC8	Cable Lock for use with WC8-CL25 Wire Rope	n/a	50
30350	CL23-WC6	Cable Lock for use with WC6-CL23 Wire Rope	10	100
30354	CL18-WC4	Cable Lock for use with WC4-CL18 Wire Rope	10	100
30351	CL12-WC3	Cable Lock for use with WC3-CL12 Wire Rope	10	100**
30348	CL6-WC2	Cable Lock for use with WC2-CL6 Wire Rope	10	100

**CL12-WC3 is also available in bulk carton of 500 pcs. (Part #30352)

Locking models available for installations in dynamic load conditions and to prevent incidental release or unauthorized adjustment of the cable lock or the load.

FOR STATIC LOAD APPLICATIONS ONLY

*Hanging at angles will reduce the WLL.


Please see our 'Effects of Hanging at Angles' table on our website at www.durodyne.com/DTTesting.php

Dyna-Tite Fast-Lock®



Item #	Code	Description	Carton	Box Qty
30015	FDM6-WC2	Fast-Lock for use with WC2-CL6 Wire Rope	100	10
30016	FDM12-WC3	Fast-Lock for use with WC3-CL12 Wire Rope	100	10
30017	FDM18-WC4	Fast-Lock for use with WC4-CL18 Wire Rope	100	10

Locking Cable Locks

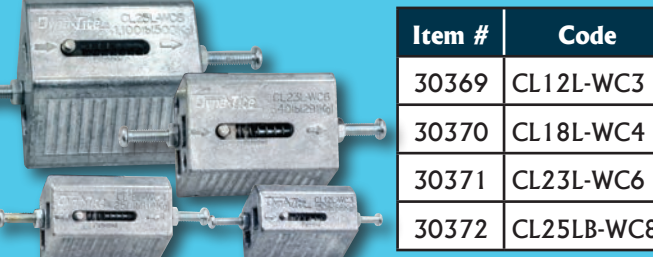

Item #	Code	Description	Quantity
30369	CL12L-WC3	Locking Cable Lock for use with WC3-CL12 Wire Rope	100/ctn.
30370	CL18L-WC4	Locking Cable Lock for use with WC4-CL18 Wire Rope	100/ctn.
30371	CL25L-WC8	Locking Cable Lock for use with WC8-CL25 Wire Rope	50/ctn.

KV Bracket Assembly



Working Load Limit	
WC2-CL6: 10-75 lbs. (5-34 kg)	WC3-CL12: 25-150 lbs. (12-68 kg)

Item #	Code	Description	Quantity
31075	KVDFM	Bracket Assembly for use with WC2-CL6 & WC3-CL12 wire rope (see working load limits above)	100/ctn.


The KV Bracket must be hung at a 90 degree angle to the suspension point.

Cable Lock Wire Rope



Item #	Code	Description	Tolerance	Construction	Quantity
30208	WC8-CL25	For use with CL25-WC8 Lock	+5%/0%	7x19	250 ft./roll
30206	WC6-CL23	For use with CL23-WC6 Lock	+0.018"/.009 in.	7x19	250 ft./roll
30204	WC4-CL18	For use with CL18-WC4 Lock	+0.014"/.007 in.	7x7	500 ft./roll
30202	WC3-CL12	For use with CL12-WC3 Lock	+0.012"/.006 in.	7x7	500 ft./roll
30200	WC2-CL6	For use with CL6-WC2 Lock	+0.010"/.005 in.	7x7	500 ft./roll


Looped Cable Assembly & Kits

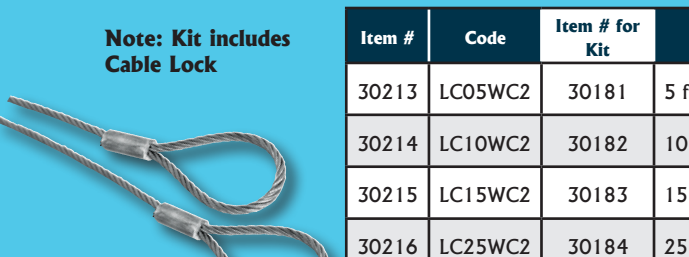

Item #	Code	Item # for Kit	Description	For Use w/ Cable Lock	Safe Working Load*	Qty
30213	LC05WC2	30181	5 ft. WC2-CL6 Wire Rope	CL6-WC2	10-75 lbs. (5-34 kg)	10 bags of 10
30214	LC10WC2	30182	10 ft. WC2-CL6 Wire Rope	CL6-WC2	10-75 lbs. (5-34 kg)	10 bags of 10
30215	LC15WC2	30183	15 ft. WC2-CL6 Wire Rope	CL6-WC2	10-75 lbs. (5-34 kg)	10 bags of 10
30216	LC25WC2	30184	25 ft. WC2-CL6 Wire Rope	CL6-WC2	10-75 lbs. (5-34 kg)	5 bags of 10
30228	LC05WC3	30185	5 ft. WC3-CL12 Wire Rope	CL12-WC3	25-150 lbs. (12-68 kg)	10 bags of 10
30229	LC10WC3	30186	10 ft. WC3-CL12 Wire Rope	CL12-WC3	25-150 lbs. (12-68 kg)	10 bags of 10
30230	LC15WC3	30187	15 ft. WC3-CL12 Wire Rope	CL12-WC3	25-150 lbs. (12-68 kg)	10 bags of 10
30232	LC25WC3	30188	25 ft. WC3-CL12 Wire Rope	CL12-WC3	25-150 lbs. (12-68 kg)	5 bags of 10
•	LC30WC3	30134	30 ft. WC3-CL12 Wire Rope	CL12-WC3	25-150 lbs. (12-68 kg)	5 bags of 10
30233	LC05WC4	30193	5 ft. WC4-CL18 Wire Rope	CL18-WC4	25-250 lbs. (12-114 kg)	10 bags of 10
30234	LC10WC4	30194	10 ft. WC4-CL18 Wire Rope	CL18-WC4	25-250 lbs. (12-114 kg)	10 bags of 10
30235	LC15WC4	30195	15 ft. WC4-CL18 Wire Rope	CL18-WC4	25-250 lbs. (12-114 kg)	10 bags of 10
30237	LC25WC4	30196	25 ft. WC4-CL18 Wire Rope	CL18-WC4	25-250 lbs. (12-114 kg)	5 bags of 10
30209	LC05WC6	•	5 ft. WC6-CL23 Wire Rope	CL23-WC6	50-640 lbs. (25-291 kg)	10 bags of 10
30210	LC10WC6	•	10 ft. WC6-CL23 Wire Rope	CL23-WC6	50-640 lbs. (25-291 kg)	10 bags of 10
30211	LC15WC6	•	15 ft. WC6-CL23 Wire Rope	CL23-WC6	50-640 lbs. (25-291 kg)	10 bags of 10
30212	LC25WC6	•	25 ft. WC6-CL23 Wire Rope	CL23-WC6	50-640 lbs. (25-291 kg)	5 bags of 10

*Safe Working Loads are based on a 5:1 Safety Factor.
**Hanging at angles will reduce the Safe Working Loads. Please see our 'Effects of Hanging at Angles' table.

Custom Cable Counter

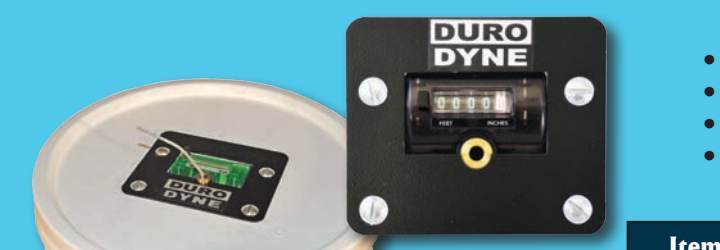

Item #	Code	Description	Quantity
30390	CCC1	Custom Cable Counter Lid	1

Cable Cutters



DTWRCL Features:		DTRWC14 Features:	
• For WC2-CL6, WC3-CL12, WC4-CL18 and WC6-CL23 Wire Rope and Dyna-Chain	• Will cut soft chain	• For WC2-CL6, WC3-CL12, WC4-CL18 and WC6-CL23 Wire Rope and Dyna-Chain	• Will cut soft chain

Item #	Code	Description	Quantity
894075	DTWRCL	Cable Cutter	1
30344	DTRWC14	WC8-CL25 Cable Cutter	1

Starter Kit



Working Load Limit	
CL12-WC3 Kit: 25-150 lbs. (12-68 kg)	CL12-WC3 Kit: 25-250 lbs. (12-114 kg)

INCLUDES:

- 1 Roll of Wire Rope
- 100 Cable Locks
- 1 Custom Cable Counter Lid and Bucket
- 1 Cable Cutter

Item #	Code	Description
30394	CL12WC3SK	CL12-WC3 Starter Kit - with WC3-CL12 Wire Rope
30393	CL18WC4SK	CL18-WC4 Starter Kit - with WC4-CL18 Wire Rope

90° Degree Eyelets

Item #	Code	Description	Use With Cable Lock	Safe Working Load*	Quantity
1/4 in. Eyelets					
30140	9014-05WC2	90° 1/4 in. Eyelet - 5 ft. x WC2-CL6 Wire Rope	CL6-WC2	10-75 lbs. (5-34 kg)	10/bag-10bag/ctn
30141	9014-10WC2	90° 1/4 in. Eyelet - 10 ft. x WC2-CL6 Wire Rope	CL6-WC2	10-75 lbs. (5-34 kg)	10/bag-10bag/ctn
30142	9014-15WC2	90° 1/4 in. Eyelet - 15 ft. x WC2-CL6 Wire Rope	CL6-WC2	10-75 lbs. (5-34 kg)	10/bag-10bag/ctn
30143	9014-25WC2	90° 1/4 in. Eyelet - 25 ft. x WC2-CL6 Wire Rope	CL6-WC2	10-75 lbs. (5-34 kg)	5/bag-10bag/ctn
30144	9014-05WC3	90° 1/4 in. Eyelet - 5 ft. x WC3-CL12 Wire Rope	CL12-WC3	25-150 lbs. (12-68 kg)	10/bag-10bag/ctn
30145	9014-10WC3	90° 1/4 in. Eyelet - 10 ft. x WC3-CL12 Wire Rope	CL12-WC3	25-150 lbs. (12-68 kg)	10/bag-10bag/ctn
30146	9014-15WC3	90° 1/4 in. Eyelet - 15 ft. x WC3-CL12 Wire Rope	CL12-WC3	25-150 lbs. (12-68 kg)	10/bag-10bag/ctn
30147	9014-25WC3	90° 1/4 in. Eyelet - 25 ft. x WC3-CL12 Wire Rope	CL12-WC3	25-150 lbs. (12-68 kg)	5/bag-10bag/ctn
30148	9014-05WC4	90° 1/4 in. Eyelet - 5 ft. x WC4-CL18 Wire Rope	CL18-WC4	25-250 lbs. (12-114 kg)	10/bag-10bag/ctn
30149	9014-10WC4	90° 1/4 in. Eyelet - 10 ft. x WC4-CL18 Wire Rope	CL18-WC4	25-250 lbs. (12-114 kg)	10/bag-10bag/ctn
30150	9014-15WC4	90° 1/4 in. Eyelet - 15 ft. x WC4-CL18 Wire Rope	CL18-WC4	25-250 lbs. (12-114 kg)	10/bag-10bag/ctn
30151	9014-25WC4	90° 1/4 in. Eyelet - 25 ft. x WC4-CL18 Wire Rope	CL18-WC4	25-250 lbs. (12-114 kg)	5/bag-10bag/ctn
3/8 in. Eyelets					
30152	9038-05WC3	90° 3/8 in. Eyelet - 5 ft. x WC3-CL12 Wire Rope	CL12-WC3	25-150 lbs. (12-68 kg)	10/bag-10bag/ctn
30153	9038-10WC3	90° 3/8 in. Eyelet - 10 ft. x WC3-CL12 Wire Rope	CL12-WC3	25-150 lbs. (12-68 kg)	10/bag-10bag/ctn
30154	9038-15WC3	90° 3/8 in. Eyelet - 15 ft. x WC3-CL12 Wire Rope	CL12-WC3	25-150 lbs. (12-68 kg)	10/bag-10bag/ctn
30155	9038-25WC3	90° 3/8 in. Eyelet - 25 ft. x WC3-CL12 Wire Rope	CL12-WC3	25-150 lbs. (12-68 kg)	5/bag-10bag/ctn
30157	9038-05WC4	90° 3/8 in. Eyelet - 5 ft. x WC4-CL18 Wire Rope	CL18-WC4	25-250 lbs. (12-114 kg)	10/bag-10bag/ctn
30158	9038-10WC4	90° 3/8 in. Eyelet - 10 ft. x WC4-CL18 Wire Rope	CL18-WC4	25-250 lbs. (12-114 kg)	10/bag-10bag/ctn
30159	9038-15WC4	90° 3/8 in. Eyelet - 15 ft. x WC4-CL18 Wire Rope	CL18-WC4	25-250 lbs. (12-114 kg)	10/bag-10bag/ctn
30160	9038-25WC4	90° 3/8 in. Eyelet - 25 ft. x WC4-CL18 Wire Rope	CL18-WC4	25-250 lbs. (12-114 kg)	5/bag-10bag/ctn

*Safe Working Loads are based on a 5:1 Safety Factor

45° Degree Eyelets

Item #	Code	Description	Use With Cable Lock	Safe Working Load*	Quantity
1/4 in. Eyelets					
30161	4514-05WC2	45° 1/4 in. Eyelet - 5 ft. x WC2-CL6 Wire Rope	CL6-WC2	10-75 lbs. (5-34 kg)	10/bag-10bag/ctn
30162	4514-10WC2	45° 1/4 in. Eyelet - 10 ft. x WC2-CL6 Wire Rope	CL6-WC2	10-75 lbs. (5-34 kg)	10/bag-10bag/ctn
30164	4514-15WC2	45° 1/4 in. Eyelet - 15 ft. x WC2-CL6 Wire Rope	CL6-WC2	10-75 lbs. (5-34 kg)	5/bag-10bag/ctn
30165	4514-05WC3	45° 1/4 in. Eyelet - 5 ft. x WC3-CL12 Wire Rope	CL12-WC3	25-150 lbs. (12-68 kg)	10/bag-10bag/ctn
30166	4514-10WC3	45° 1/4 in. Eyelet - 10 ft. x WC3-CL12 Wire Rope	CL12-WC3	25-150 lbs. (12-68 kg)	10/bag-10bag/ctn
30167	4514-15WC3	45° 1/4 in. Eyelet - 15 ft. x WC3-CL12 Wire Rope	CL12-WC3	25-150 lbs. (12-68 kg)	10/bag-10bag/ctn
30168	4514-25WC3	45° 1/4 in. Eyelet - 25 ft. x WC3-CL12 Wire Rope	CL12-WC3	25-150 lbs. (12-68 kg)	5/bag-10bag/ctn
30169	4514-05WC4	45° 1/4 in. Eyelet - 5 ft. x WC4-CL18 Wire Rope	CL18-WC4	25-250 lbs. (12-114 kg)	10/bag-10bag/ctn
30170	4514-10WC4	45° 1/4 in. Eyelet - 10 ft. x WC4-CL18 Wire Rope	CL18-WC4	25-250 lbs. (12-114 kg)	10/bag-10bag/ctn
3/8 in. Eyelets					
30174	4538-10WC3	45° 3/8 in. Eyelet - 10 ft. x WC3-CL12 Wire Rope	CL12-WC3	25-150 lbs. (12-68 kg)	10/bag-10bag/ctn
30175	4538-15WC3	45° 3/8 in. Eyelet - 15 ft. x WC3-CL12 Wire Rope	CL12-WC3	25-150 lbs. (12-68 kg)	10/bag-10bag/ctn
30176	4538-25WC3	45° 3/8 in. Eyelet - 25 ft. x WC3-CL12 Wire Rope	CL12-WC3	25-150 lbs. (12-68 kg)	5/bag-10bag/ctn
30177	4538-05WC4	45° 3/8 in. Eyelet - 5 ft. x WC4-CL18 Wire Rope	CL18-WC4	25-250 lbs. (12-114 kg)	10/bag-10bag/ctn
30179	4538-15WC4	45° 3/8 in. Eyelet - 15 ft. x WC4-CL18 Wire Rope	CL18-WC4	25-250 lbs. (12-114 kg)	10/bag-10bag/ctn
30180	4538-25WC4	45° 3/8 in. Eyelet - 25 ft. x WC4-CL18 Wire Rope	CL18-WC4	25-250 lbs. (12-114 kg)	5/bag-10bag/ctn

*Safe Working Loads are based on a 5:1 Safety Factor

Straight Eyelets

Item #	Code	Description	Use With Cable Lock	Safe Working Load*	Quantity
1/4 in. Eyelets					
30110	S14-05WC2	Straight 1/4 in. Eyelet - 5ft. x WC2-CL6 Wire Rope	CL6-WC2	10-75 lbs. (5-34 kg)	10/bag - 10 bags/ctn
30111	S14-10WC2	Straight 1/4 in. Eyelet - 10ft. x WC2-CL6 Wire Rope	CL6-WC2	10-75 lbs. (5-34 kg)	10/bag - 10 bags/ctn
30116	S14-15WC2	Straight 1/4 in. Eyelet - 15ft. x WC2-CL6 Wire Rope	CL6-WC2	10-75 lbs. (5-34 kg)	10/bag - 10 bags/ctn
30122	S14-05WC3	Straight 1/4 in. Eyelet - 5ft. x WC3-CL12 Wire Rope	CL12-WC3	25-150 lbs. (12-68 kg)	10/bag - 10 bags/ctn
30123	S14-10WC3	Straight 1/4 in. Eyelet - 10ft. x WC3-CL12 Wire Rope	CL12-WC3	25-150 lbs. (12-68 kg)	10/bag - 10 bags/ctn
30128	S14-15WC3	Straight 1/4 in. Eyelet - 15ft. x WC3-CL12 Wire Rope	CL12-WC3	25-150 lbs. (12-68 kg)	10/bag - 10 bags/ctn
30129	S14-25WC3	Straight 1/4 in. Eyelet - 25ft. x WC3-CL12 Wire Rope	CL12-WC3	25-150 lbs. (12-68 kg)	5/bag - 10 bags/ctn

*Safe Working Loads are based on a 5:1 Safety Factor

Dyna-Stud & Kits

Item #	Code	Item # for Kit	Description	For Use w/ Cable Lock	Safe Working Load*	Qty